

**Energy Research and Development Division  
FINAL PROJECT REPORT**

# **LIFE CYCLE ASSESSMENT OF COMMUNITY DESIGN CHANGES**

## **Energy and Environmental Assessment of the Los Angeles Metro's Orange and Gold Lines**

Prepared for: California Energy Commission  
Prepared by: Arizona State University  
University of California, Los Angeles  
University of California, Berkeley



MAY 2013  
CEC-500-2013-138

**PREPARED BY:**

***Primary Author(s):***

Mikhail Chester  
William Eisenstein  
Stephanie Pincetl  
Zoe Elizabeth  
Juan Matute  
Paul Bunje

UCLA Institute of the Environment  
La Kretz Hall, Suite 300  
619 Charles E Young Drive East  
Box 951496  
Los Angeles, CA 90095-1496

***Contract Number: 500-10-009***

***Prepared for:***

**California Energy Commission**

Dan Gallagher  
***Contract Manager***

Linda Spiegel  
***Office Manager***  
***Energy Generation Research Office***

Laurie ten Hope  
***Deputy Director***  
***ENERGY RESEARCH AND DEVELOPMENT DIVISION***

Robert P. Oglesby  
***Executive Director***

**DISCLAIMER**

This report was prepared as the result of work sponsored by the California Energy Commission. It does not necessarily represent the views of the Energy Commission, its employees or the State of California. The Energy Commission, the State of California, its employees, contractors and subcontractors make no warranty, express or implied, and assume no legal liability for the information in this report; nor does any party represent that the uses of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the California Energy Commission nor has the California Energy Commission passed upon the accuracy or adequacy of the information in this report.

## **ACKNOWLEDGEMENTS**

The authors thank Emmanuel Liban, John Drayton, Alvin Kusumoto, Scott Page, Jimmy Jimenez, and Susan Phifer of Los Angeles Metro.

This research was conducted with the assistance of two graduate students, Connery Cepeda of UC Berkeley and Julia Salinas of UCLA and LA Metro.

The authors also thank our project advisory committee members.

- Emmanuel Liban, Manager, Environmental Compliance, LA Metro
- Dan Gallagher, Project Manager, PIER, CEC
- Eric Masanet, Deputy Leader, International Energy Studies Group, Lawrence Berkeley National Laboratory
- Jacob Lieb, Manager, Assessment Housing and EIR, SCAG
- Katie Matchet, Long Range Planner, City of Ventura
- Keith Bergthold, Assistant Director, Sustainable Division, City of Fresno
- Lisa Schweitzer, Associate Professor, University of Southern California
- Pam O'Conner, City of Santa Monica, City Council
- Pierre DuVair, Senior Climate Policy Analyst, CEC
- Roland Geyer, Assistant Professor, UC Santa Barbara
- Said Gharbieh, Principal, ARUP
- Steve Done, Engineer, ARUP
- Timothy Papandreou, Deputy Director, Sustainable Streets Program, San Francisco MTA

Tim Tadlock, Transportation Policy Planner, Caltrans

## PREFACE

The California Energy Commission Energy Research and Development Division supports public interest energy research and development that will help improve the quality of life in California by bringing environmentally safe, affordable, and reliable energy services and products to the marketplace.

The Energy Research and Development Division conducts public interest research, development, and demonstration (RD&D) projects to benefit California.

The Energy Research and Development Division strives to conduct the most promising public interest energy research by partnering with RD&D entities, including individuals, businesses, utilities, and public or private research institutions.

Energy Research and Development Division funding efforts are focused on the following RD&D program areas:

- Buildings End-Use Energy Efficiency
- Energy Innovations Small Grants
- Energy-Related Environmental Research
- Energy Systems Integration
- Environmentally Preferred Advanced Generation
- Industrial/Agricultural/Water End-Use Energy Efficiency
- Renewable Energy Technologies
- Transportation

*Life Cycle Assessment of Community Design Changes* is the final report for the Methodology to Estimate the Net Energy and Greenhouse Gas Emission Savings from Policies Intended to Reduce Vehicle Travel project (contract number 500-10-009) conducted by University of California, Los Angeles. The information from this project contributes to Energy Research and Development Division's Transportation Program.

For more information about the Energy Research and Development Division, please visit the Energy Commission's website at [www.energy.ca.gov/research/](http://www.energy.ca.gov/research/) or contact the Energy Commission at 916-327-1551.

## ABSTRACT

Public transit systems are often accepted as energy and environmental improvements to automobile travel but few life cycle assessments exist to understand the effects of implementing transit policy decisions. This project will help inform decision-makers by providing four related deliverables: 1) a life cycle assessment of three transportation options; 2) a policy analysis for ways life cycle assessment could be incorporated into transportation planning; 3) a report that surveys decision-makers on the barriers to increasing transit ridership; and 4) a decision-support tool for transportation planners who are seeking to incorporate life cycle assessment into their decision making. This is the final report for the project and provides an updated life cycle assessment based on improved data from the California Air Resources Board that was not available when the original report was released in 2012.

**Keywords:** Los Angeles, Metro, Transit, Life Cycle Assessment, Energy, Air Emissions, Greenhouse Gases, Conventional Air Pollutants, Criteria Air Pollutants, Infrastructure, Travel Behavior, Transportation Planning, Urban Planning, Transportation Policy.

Please use the following citation for this report:

Chester, Mikhail; William Eisenstein; Stephanie Pincetl. (University of California, Los Angeles). 2013. *Life Cycle Assessment of Community Design Changes*. California Energy Commission. Publication number: CEC-500-2013-138.

# TABLE OF CONTENTS

<b>Acknowledgements .....</b>	<b>i</b>
<b>PREFACE .....</b>	<b>ii</b>
<b>ABSTRACT .....</b>	<b>iii</b>
<b>TABLE OF CONTENTS.....</b>	<b>iv</b>
<b>LIST OF FIGURES .....</b>	<b>v</b>
<b>LIST OF TABLES .....</b>	<b>vi</b>
<b>EXECUTIVE SUMMARY .....</b>	<b>1</b>
Introduction .....	1
Project Purpose.....	1
Project Results.....	1
Project Benefits .....	4
<b>CHAPTER 1: Project Background .....</b>	<b>5</b>
<b>CHAPTER 2: Site Selection .....</b>	<b>6</b>
2.1 Screening Criteria.....	6
2.1.1 Initial Screening Process.....	6
2.1.2 In-Depth Screening process .....	6
2.1.3 Choice Selection.....	7
<b>CHAPTER 3: Phase 1 – Energy and Environmental Assessment Methodology .....</b>	<b>10</b>
3.1 System Boundary Selection .....	10
3.2 Energy and Environmental Indicators.....	12
3.3 Development of Modal Life Cycle Inventories.....	12
3.3.1 Los Angeles (LA) Sedan.....	12
3.3.2 Los Angeles Metro’s Orange Line .....	15
3.3.3 Los Angeles Metro’s Gold Line.....	20
3.3.4 Functional Unit.....	26
<b>CHAPTER 4: Phase 1 – Modal Results and Interpretation .....</b>	<b>30</b>
4.1 Energy Use and GHG Emissions .....	30

4.2	Conventional Air Emissions .....	31
4.3	Occupancy Sensitivity .....	34
4.4	Ridership Targets and Environmental Payback .....	36
<b>CHAPTER 5: Phase 2 – Regional Environmental Effects .....</b>		<b>38</b>
5.1	GHG Payback .....	38
5.2	Connecting Emissions with Impact Potentials .....	39
<b>CHAPTER 6: Policy Implications of LCA and LA Transportation Alternatives .....</b>		<b>41</b>
6.1	Policy Implications of Life Cycle GHG Emissions .....	42
6.2	Policy Implications of Life Cycle Conventional Air Emissions .....	43
<b>REFERENCES .....</b>		<b>45</b>

## LIST OF FIGURES

Figure 1: Los Angeles Metro Orange Line Route Map .....	17
Figure 2: Typical Orange Line Station and View of Roadway .....	18
Figure 3: Orange Line Section at Topham Street .....	19
Figure 4: Los Angeles Metro Gold Line Route Map .....	22
Figure 5: Typical Gold Line Platform Station .....	23
Figure 6: Gold Line Aerial Track Segment .....	24
Figure 7: Retained Fill and Open Cut Gold Line Segments .....	24
Figure 8: At-Grade in Roadway Median Gold Line Track Segment .....	25
Figure 9: At-Grade in Freeway Median Gold Line Track Segment .....	25
Figure 10: Orange Line Bus Occupancy by Hour of Day .....	28
Figure 11: Gold Line Train Occupancy by Hour of Day .....	28
Figure 12: Life Cycle Energy Use in MJ per PMT .....	30
Figure 13: Life Cycle GHG Emissions in g CO <sub>2e</sub> per PMT .....	31
Figure 14: Life Cycle PM <sub>10</sub> Emissions in mg per PMT .....	31
Figure 15: Life Cycle PM <sub>2.5</sub> Emissions in mg per PMT .....	32
Figure 16: Life Cycle SO <sub>2</sub> Emissions in mg per PMT .....	32
Figure 17: Life Cycle NO <sub>x</sub> Emissions in mg per PMT .....	33
Figure 18: Life Cycle VOC Emissions in mg per PMT .....	33
Figure 19: Life Cycle CO Emissions in mg per PMT .....	34
Figure 20: Breakeven Energy Consumption and GHG Emissions .....	35
Figure 21: Breakeven PM Emissions .....	35
Figure 22: Breakeven SO <sub>2</sub> and NO <sub>x</sub> Emissions .....	36
Figure 23: Breakeven VOC and CO Emissions .....	36
Figure 24: Orange and Gold Line Environmental Payback Speed .....	37
Figure 25: GHG (Gg CO <sub>2e</sub> ) Payback for Orange and Gold Lines .....	38
Figure 26: Respiratory Impact Potential (Mg PM <sub>2.5e</sub> ) Payback .....	39

Figure 27: Smog Formation Potential (Pg O <sub>3e</sub> ) Impact.....	40
---	----

## LIST OF TABLES

Table 1: Site Selection Initial Screening.....	8
Table 2: Site Selection In Depth Screening.....	9
Table 3: Life Cycle Assessment System Boundary .....	11
Table 4: LADWP Electricity Mixes for 2009 and Future RPS.....	26



# EXECUTIVE SUMMARY

## Introduction

Public transit systems are often accepted as energy and environmental improvements to automobile travel but few life cycle assessments exist to help understand the effects of implementing transit policy decisions.

## Project Purpose

The goals of this project were to better inform decision-makers by providing: 1) a life cycle assessment (LCA) of three transportation options; 2) a policy analysis for ways LCA could be incorporated into transportation planning; 3) a report that surveys decision-makers on the barriers to increasing transit ridership; and 4) a decision-support tool for transportation planners who are seeking to incorporate life cycle assessment into their decision-making.

This was the final report for the project and provided an updated life cycle assessment based on improved data from the California Air Resources Board that was not available when the original report was released in 2012.

## Project Results

Researchers evaluated the decision to construct and operate public transportation systems and the expected energy and environmental benefits over continued automobile use. Initial screening of the transportation systems included advanced implementation (5 to 10 years so change in ridership could be observed), similar geographic regions to ensure consistency of analysis parameters, common transit agencies or authorities to ensure a consistent management culture, and modes reflecting large infrastructure investments to provide an opportunity for robust life cycle assessment of large impact components. The results of an in-depth screening process led to selection of the Los Angeles Metro's Orange and Gold lines.

The life cycle assessment framework was used to evaluate energy inputs and emissions of greenhouse gases, particulate matter (10 and 2.5 microns), sulfur dioxide, nitrogen oxides, volatile organic compounds, and carbon monoxide. Life cycle energy use and emissions inventories were developed for each mode considering direct (vehicle operation), ancillary (non-vehicle operation including vehicle maintenance, infrastructure construction and infrastructure operation) and supply chain processes and services. In addition to greenhouse gas (GHG) emissions, the inventories were linked to their potential for respiratory impacts and smog formation and the time it takes for payback in the lifetime of each transit system.

Results showed that for energy use and greenhouse gas emissions the inclusion of life cycle components increased the footprint between 48 percent and 100 percent from vehicle propulsion exclusively. Conventional air emissions showed much more dramatic increases, highlighting the effectiveness of "tailpipe" environmental policy. Vehicle operation is often small compared to other components in the life cycle. The dominating contributions from life cycle components showed that the decision to build an infrastructure and operate a transportation mode in Los Angeles had impacts far outside the city and region. Life cycle results were initially compared at each system's average occupancy and a breakeven analysis

was performed to compare the range at which modes were energy and environmentally competitive.

The results showed that including a broad suite of energy and environmental indicators produced potential tradeoffs that were critical to decision makers. While the Orange and Gold line required less energy and produced fewer greenhouse gas emissions per passenger mile traveled than the automobile, this ordering was not necessarily the case for conventional air emissions.

The report *Greener Miles: Policy Options to Account for Life Cycle Energy and Emissions in Urban Transportation Systems* outlined possible paths for the state to continue that tradition by shifting efforts to assess and reduce energy use, GHGs and criteria air pollutants from an end-use basis to a full life cycle basis. The LCA and related policy mechanisms described in this report would allow state, regional and local policymakers to make transportation infrastructure choices that minimized harmful emissions not only locally, but state-wide and globally. This report built upon the life cycle assessment by examining the potential role of LCA in transportation planning and policy. In addition the report:

- Described the existing structure of transportation policy, including the environmental impact assessment process.
- Identified the existing policies that most strongly shape the energy consumption of the passenger transportation system.
- Identified the barriers to change in those policies.
- Described existing partial precedents for incorporating life cycle assessment and decision criteria into transportation policy and planning.
- Summarized a case study of transportation-system life cycle assessment in Los Angeles County, including a description of the policy and financing processes that created the Los Angeles Metro Orange Line (bus rapid transit) and Gold Line (light rail).

The report identified six possible basic policy structures that could be used to encourage or require the use of LCA in transportation planning and policy:

1. Federal or state legislation requiring the selection of lowest-life-cycle-impact transportation projects.
2. A federal or state program to provide preferential funding to lowest-life-cycle-impact projects, akin to the federal Congestion and Air Quality Mitigation (CMAQ) program.
3. A new planning standard to apply to the Regional Transportation Plans (RTPs) prepared by Metropolitan Planning Organizations (MPOs).
4. A new environmental impact assessment method to be used under the California Environmental Quality Act (CEQA).

5. The incorporation of life cycle assessment into Transportation Control Measure selection under the Clean Air Act.
6. A cap-and-trade system for transportation system-induced life cycle emissions applied to regional and local transportation agencies modeled on the system used under California's Low-Carbon Fuel Standard (LCFS).

The optimal policy solution to incorporating life cycle assessment into transportation planning may well consist of a mixture of these mechanisms or a deeper reform of the transportation system as a whole.

Prior research indicated that shifting travel from single occupant vehicles to transit could be an effective implementation strategy to reduce emissions and energy use from transportation. The research team interviewed 24 individuals from California transit agencies, transportation planning organizations and local governments to learn about perceived barriers and opportunities to reduce single occupant vehicle travel and increase transit ridership in California.

Respondents believed the most important roles of transit were to provide mobility to all persons, reduce congestion, and increase the economic competitiveness of regions. Respondents saw the statewide emissions reduction and energy conservation goals as peripheral to these local and regional goals.

Among the strategies respondents believed were most effective were those that would reduce trip times to make transit more competitive with the automobile. While dedicated rights-of-way are extremely effective in reducing transit travel times and increasing reliability in congestion areas, this implementation measure is politically unpopular with many local governments. Local governments with authority over transportation rights-of-way must prioritize transit vehicles over automobiles to cost-effectively improve transit service in some California corridors.

Respondents saw market-driven factors as an opportunity and existing neighborhood's views towards density as a barrier to creating new transit-oriented development. Respondents saw local government's parking requirements for new developments, including transit oriented developments as barriers to reducing single occupant vehicle travel and encouraging transit use to those developments. Barriers to expanding fixed, dedicated facility transit networks included the cost of building and financing such projects and environmental regulations.

The authors recommended a coordinated campaign to expand upon recent trends in public perception of transportation and travel behavior. Both of these trends indicated an opportunity for reducing single occupant vehicle travel and increasing the use of transit, high occupancy vehicles and non-motorized transportation.

Researchers also developed a decision-support tool for transportation planners who wish to incorporate LCA into their work. The support tool can be used like a guidebook to explain the basics of LCA, the critical LCA factors for transportation and different ways LCA can improve transportation planning.

## **Project Benefits**

Public transit systems could be an important contributor to decreasing automobile emissions in California, which will help to reduce greenhouse gas emissions that contribute to climate change as well as other air emissions that cause air pollution. The life cycle assessment and related policy mechanisms described in this report could help policymakers make transportation infrastructure choices that minimize harmful emissions not only locally, but state-wide and globally.

# CHAPTER 1:

## Project Background

The Los Angeles Metro Orange and Gold lines are recently implemented public transit systems that have the opportunity to reduce energy consumption and emissions impacts from passenger transportation in the megaregion. The assessment of the Orange and Gold lines provides information about the potential successes of implementing cleaner transportation options in one of the most heavily utilized automobile cities in the United States. Comparing these lines to automobile use should not be based strictly on vehicle operation effects. While passenger movement is the underlying goal of these systems, vehicle travel cannot happen without many other processes and services. Vehicles must be manufactured and maintained, an infrastructure constructed and operated, and energy produced and delivered.

Life cycle assessment is the preeminent framework for evaluating energy and environmental effects of complex systems. Previous LCAs have been developed for passenger transportation modes and have shown that the bulk of some effects are often not associated with vehicle operation [Chester and Horvath 2009, Chester and Horvath ERL 2010b]. The inclusion of vehicle, infrastructure, and energy production life cycle components captures a more comprehensive footprint for modes and identifies ancillary and supply chain processes that are often ignored. To evaluate the Orange line, Gold line, and competing automobile trip, the LCA framework is used to determine energy inputs and emission outputs of vehicle, infrastructure, and energy production components. Results are normalized per passenger mile traveled (PMT) to capture the energy and environmental effectiveness of providing passenger mobility.

This project is administered in two phases. In phase one, the life cycle inventories for the Orange line, Gold line, and competing automobile trip are developed to determine the comprehensive footprints of each mode. In phase two, the inventories are used in a consequential LCA framing to evaluate the environmental outcomes of the decision to build and operate the Orange and Gold lines. In phase two, the net energy and environmental impacts to Los Angeles are determined by evaluating the life cycle effects of adding transit, operating transit, and potential reduced automobile use.

## CHAPTER 2: Site Selection

To provide decision-makers with the information necessary to weigh public investments in transportation systems, we developed a set of criteria for site selection that would provide the most consistent and reliable data among all the systems. Data also had to be accessible that would inform the LCA analysis. The first task was to develop a list of transportation systems across the state and to then develop screening criteria and assure there was sufficient data available to conduct a robust LCA comparative analysis.

All transportation system modes were assumed to be compared to traditional automobile travel with explicit assumptions about type of car, ridership numbers and distance of travel appropriate for the region selected.

### 2.1 Screening Criteria

The following initial screening process was developed:

- Advanced implementation – 5 to 10 years so change in ridership could be observed.
- Two projects in the same geographic region to ensure consistency of variables such as climate and socio-demographics.
- Multiple modes operated by the same transit agency/authority to ensure consistent management culture and to capture choice decisions between modes by the same agency.
- Modes reflecting large infrastructure investments such that the LCA analysis would compare and contrast important public investments.

#### 2.1.1 Initial Screening Process

Using the initial screening criteria enumerated above, researchers eliminated the College Avenue corridor in Berkeley and Oakland, the Redding “Sundial” Pedestrian Bridge, the Riverside RTA Commuter Link, the Altamont Commuter Express - Train Stockton to San Jose and the San Joaquin Regional Rail Commission (among other regional systems). These did not provide a sufficiently consistent management framework so they could be compared without risking comparison of very different local transportation agencies, nor did they reflect the management of two different types of systems by one agency.

#### 2.1.2 In-Depth Screening process

In-depth screening criteria consisted of creating two tiers of information focusing on a.) data availability and b.) information availability about detailed system characteristics.

Primary criteria focused on the existence of robust and relevant data. This included:

- Sufficient information to undertake an analysis of the mode-shift from private automobile to mass transit.
- Sufficient information to conduct a valid LCA, including:

- Vehicle Miles Traveled (VMT)
- Operation/maintenance inputs
- Ridership survey data
- Congestion analysis around the project area/region
- Pre and post-project mode shift information about changes.
  - Systems needed to be in place at least 5 years to theoretically notice a difference in travel behavior, but no more than 10 years so that other changes would not influence the fundamental mode shift travel behavior (such as land use change).
  - Magnitude of infrastructure investment (costs and engineering studies)
  - Energy type and switch, including “clean” energy.

Secondary criteria were developed as well. These included

- Project specific data availability about infrastructure inputs
- Statistics about travel to and from the infrastructure projects
- Growth and planning projections: population, land use development and density changes as well as targeted growth policies
- Regional population characteristics
- Community population characteristics around the system(s)
- Contrasting population characteristics
- Supportive policy environment for alternative transportation mode development.

### 2.1.3 Choice Selection

Applying the screening criteria to multiple transportation systems across MPOs in California, researchers determined to develop the life cycle analysis of two transportation modes in Southern California, built and managed by the Los Angeles Metropolitan Transit Authority, a county-wide transportation agency overseen by a Board of Directors representing member cities and the county. The two systems chosen for comparison are the Orange Line Bus Rapid Transit corridor, and the Gold Line light rail system.

**Table 1: Site Selection Initial Screening**

	LA Metro Gold Line	LA Metro Orange Line	LA/Long Beach Blue Line	LA Metro Silver Line	LA Metro Red Line Extension	San Francisco Muni Metro "T Third Street" Line	Sacramento Blue Line Extension	San Diego Green Line Extension
Ability to analyze two projects in same geographic region	Y	Y	Y	Y	Y	Y	Y	Y
Ability to analyze two projects run by same transit agency/authority	Y	Y	Y	Y	Y	Y	Y	Y
Ability to study two different modal types run same transit agency/authority	Y	Y	Y	Y	Y	Y	Y	Y
Multiple modes (e.g. bus, rail, walking, biking, driving) are available along the route	Y	Y	Y	Y	Y	Y	Y	Y
Large Infrastructure Changes	Y	Y	Y	Y	Y	Y	Y	Y

Los Angeles Metro is one of the largest transit agencies in the nation, serving a county population of nearly 10 million people. It has been at the forefront of trying to meet transportation needs over a very large geographical region with limited resources. Every investment is based on highly vetted choices and alternatives, and backed with extensive studies and analysis. At the same time the agency has also experimented with different modes in different parts of the region. Choosing to study two LA Metro transportation systems provided researchers with the ability to conduct robust LCAs. Such an analysis should provide transportation policy makers across the state with information that will support their investment strategies, regarding energy consumption, air emissions, and ridership.



**Table 2: Site Selection In Depth Screening**

	LA Metro Gold Line	LA Metro Orange Line	LA/Long Beach Blue Line	LA Metro Silver Line	LA Metro Red Line Extension	San Francisco Muni Metro "T Third Street" Line	Sacramento Blue Line Extension	San Diego Green Line Extension
<b>PRIMARY CRITERIA</b>								
<b>Mode Shift</b>								
Large Mode Shift Potential (cars to alternative)	Y	Y	Y	Y	Y	Y	Y	Y
<b>Data Availability (EIRs/feasibility studies/survey data available to provide the following)</b>								
VMT	Y-EIR, Scag	Y-EIR, Scag	Y-EIR, Scag		Y-EIR, Scag	Y-MTA	Y-RT	Y-MTS/Caltrans
Pre-project mode split	Not in EIR	Y-EIR	Y-EIR		Y-EIR			
Post-project mode split	Not in EIR	Not in EIR	Not in EIR		Not in EIR			
Congestion around project area and region	Intersections only in EIR	Y-EIR	Y-EIR		Y-EIR	Y	Y	Y
Ridership Survey Data	Y-EIR, Metro	Y-EIR, Metro	Y-EIR, Metro		Y-EIR, Metro	Y-MTA	Y-RT	Y-MTS/Caltrans
Operation/maintenance inputs	Y-Metro	Y-Metro	Y-Metro		Y-Metro	Y-MTA	Y-RT	Y-MTS/Caltrans
<b>Infrastructure</b>								
Advanced Implementation (5-10 years)						N	Y	Y
Large Infrastructure Changes	Y-EIR	Y-EIR	Y-EIR		Y-EIR	Y	Y	Y
Magnitude of Infrastructure Investment	Y-EIR	Y-EIR	Y-EIR		Y-EIR	Y	Y	Y
Energy type/switch/clean energy switch	Y-EIR	Y-EIR	Y-EIR		Y-EIR			
<b>SECONDARY CRITERIA</b>								
<b>Data Availability</b>								
<b>Infrastructure Inputs</b>								
Statistics on travel to and from the project	Y-EIR	Y-EIR	Y-EIR		Y-EIR	Y-EIR	Y-EIR	Y-EIR
<b>Geography</b>								
Area of anticipated population growth	Y-EIR	Y-EIR	Y-EIR		Y-EIR	N-already urban	Y	Y
Area of targeted growth/development/density	Y-EIR	Y-EIR	Y-EIR		Y-EIR	Y	Y	Y
<b>Demographics</b>								
Regional population size	Y-EIR	Y-EIR	Y-EIR		Y-EIR	Y	Y	Y
Sociodemographics of surrounding community	N	Y-EIR	Y-EIR		Y-EIR			
<b>Relationship</b>								
Key overlap in characteristics								
Same type of project, different geo-demography								
<b>Policy Environment</b>								
Complimentary transportation policies exist in the region								
Considered BMP by CARB/CEC or other								

## **CHAPTER 3:**

# **Phase 1 – Energy and Environmental Assessment Methodology**

Orange and Gold line travel are compared to a competing automobile trip. In phase one, a life cycle inventory of energy consumption and air emissions is developed for the three modes, in both the near-term and long-term. Per PMT life cycle inventories are presented to illustrate the effects of including indirect and supply chain processes not typically included in vehicle energy or environmental footprints. The inventory is the foundation for the phase two consequential assessment.

### **3.1 System Boundary Selection**

System boundary selection is a critical first step in LCA to establish a consistent scope for comparing alternatives (in this case, travel on one of the three modes). LCAs that do not establish a consistent system boundary are likely to compare uncommon components across systems leading to results that cannot be compared. Recent transportation LCAs have established system boundaries that include vehicle, infrastructure, and energy components [Chester and Horvath 2012, Chester et al. AE 2010, Chester and Horvath 2009]. These studies have shown that for many air emissions, the majority of pollutants occur from life cycle components and not vehicle operation. Furthermore, these studies establish the need to include upstream supply chains. For example, aggregate use for concrete and asphalt, requires mining raw materials, processing to final form, and distribution, and these processes can dominate certain emissions [Chester and Horvath 2009]. A system boundary consistent with that used in the aforementioned cited literature is applied including upstream supply chain requirements. For this report, the terminology of life cycle *grouping* and life cycle *components* is used. A grouping refers to the aggregation of several components. For example, the Gold line infrastructure construction grouping includes extraction and processing of raw materials into final products (e.g., steel and concrete), excavation and construction activities for different track segment types (e.g., aerial and at-grade), station construction, and so on. There are roughly 150 components evaluated for each mode and the groupings (used in the discussion of the analysis methodology and reporting of results) are designed to relay critical information in the most usable form to readers. This analysis builds on existing research and in-depth discussion of fundamental approaches used to determine process effects is available in other literature (and cited in later sections). Table 3 shows the system boundary of analysis with life cycle groupings and generalized life cycle components for each of the modes.

**Table 3: Life Cycle Assessment System Boundary**

Life Cycle Grouping	Sedan	Orange Line	Gold Line
Vehicle			
Manufacturing	<ul style="list-style-type: none"> <li>Sedan</li> <li>Transport to Point of Sale</li> </ul>	<ul style="list-style-type: none"> <li>Bus</li> <li>Transport to Point of Sale</li> </ul>	<ul style="list-style-type: none"> <li>Train</li> <li>Transport to Point of Sale</li> </ul>
Operation	<ul style="list-style-type: none"> <li>Propulsion</li> <li>Idling</li> </ul>	<ul style="list-style-type: none"> <li>Propulsion</li> <li>Idling</li> </ul>	<ul style="list-style-type: none"> <li>Propulsion</li> <li>Idling</li> </ul>
Maintenance	<ul style="list-style-type: none"> <li>Typical Sedan Maintenance</li> <li>Tire Replacement</li> <li>Battery Replacement</li> </ul>	<ul style="list-style-type: none"> <li>Typical Bus Maintenance</li> <li>Tire Replacement</li> <li>Battery Replacement</li> </ul>	<ul style="list-style-type: none"> <li>Typical Train Maintenance</li> <li>Train Cleaning</li> <li>Flooring Replacement</li> </ul>
Insurance	<ul style="list-style-type: none"> <li>Sedan Liability</li> </ul>	<ul style="list-style-type: none"> <li>Bus Liability</li> <li>Operator Fringe Benefits</li> </ul>	<ul style="list-style-type: none"> <li>Train Liability</li> <li>Operator Fringe Benefits</li> </ul>
Infrastructure			
Construction	<ul style="list-style-type: none"> <li>Roadway Construction</li> </ul>	<ul style="list-style-type: none"> <li>Roadway Construction</li> <li>Station Construction</li> </ul>	<ul style="list-style-type: none"> <li>Track Construction</li> <li>Station Construction</li> </ul>
Operation	<ul style="list-style-type: none"> <li>Roadway Lighting</li> <li>Herbicide Use</li> </ul>	<ul style="list-style-type: none"> <li>Road and Station Lighting</li> <li>Herbicide Use</li> <li>Control and Signaling</li> </ul>	<ul style="list-style-type: none"> <li>Track, Station, and Parking Lighting</li> <li>Herbicide Use</li> <li>Train Control</li> <li>Miscellaneous (Escalators, Equipment)</li> </ul>
Maintenance	Roadway maintenance is the result of heavy duty vehicles and thus not charged to small cars.	<ul style="list-style-type: none"> <li>Road and Station Maintenance</li> </ul>	<ul style="list-style-type: none"> <li>Track and Station Maintenance</li> </ul>
Parking	<ul style="list-style-type: none"> <li>Curbside Parking</li> </ul>	<ul style="list-style-type: none"> <li>Dedicated Parking</li> </ul>	<ul style="list-style-type: none"> <li>Dedicated Parking</li> </ul>
Insurance	<ul style="list-style-type: none"> <li>Road Workers Fringe Benefits</li> </ul>	<ul style="list-style-type: none"> <li>Non-vehicle Workers Fringe Benefits</li> <li>Infrastructure Liability</li> </ul>	<ul style="list-style-type: none"> <li>Non-vehicle Workers Fringe Benefits</li> <li>Infrastructure Liability</li> </ul>
Energy Production			
Extraction, Processing, & Distribution	<ul style="list-style-type: none"> <li>Gasoline Extraction, Processing, &amp; Distribution</li> </ul>	<ul style="list-style-type: none"> <li>Natural Gas Extraction, Processing, Distribution, &amp; Compression</li> </ul>	<ul style="list-style-type: none"> <li>Raw Fuel Extraction and Processing, Electricity Generation, Transmission &amp; Distribution</li> </ul>

## 3.2 Energy and Environmental Indicators

Energy inputs and air emission outputs including greenhouse gases and conventional air emissions are evaluated. Reporting energy use is challenging because of the many forms that may be valuable to the research questions asked. Energy use can be reported as primary, end-use, fossil, non-fossil, renewable, non-renewable, electrical, non-electrical, and so on. We report energy use as end-use, a useful metric for transportation decision makers who have some control over the energy consumption inputs of their system. Greenhouse gases (GHGs) include CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O normalized to CO<sub>2</sub>-equivalence (CO<sub>2</sub>e) using IPCC 100 year radiative forcing factors of 25 for CH<sub>4</sub> and 298 for N<sub>2</sub>O. Conventional air pollutants is a term used to describe the primary air emissions of particulate matter (PM), sulfur dioxide (SO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), volatile organic compounds (VOCs), carbon monoxide (CO), and lead. These conventional air pollutants are either directly or indirectly (through atmospheric chemistry where secondary pollutants such as ozone are formed) responsible for significant human health and environmental impacts and are regulated by the 1970 Clean Air Act and Amendments. PM is reported as 2.5 micron diameter or less (PM<sub>2.5</sub>), and greater than 2.5 microns to 10 microns (PM<sub>10</sub>). Conventional air pollutants are evaluated (with the exception of lead due to lack of data) for all life cycle components. Including a broad suite of environmental indicators is necessary for understanding the comprehensive impacts of transportation systems. By evaluating multiple indicators, it is sometimes the case that a decision that decreases one emission may increase another and transportation planners that have life cycle results in hand can develop strategies for avoiding these tradeoffs that maximize the human health and environmental benefits across all impact categories.

## 3.3 Development of Modal Life Cycle Inventories

The approach for generating the life cycle inventories of the three modes is based on existing work by the authors. Detailed methodological discussions are available in existing literature [Chester and Horvath 2009, Chester 2008] and the following discussion identifies the critical factors and methods for evaluating the three Los Angeles modes and their geographic-specific processes. For each mode, vehicle, infrastructure, and energy production groupings are discussed with the fundamental assumptions for critical parameters. Given the challenge of assessing a single life cycle footprint of each mode given the expected long lifetimes of the new transit systems, both a near-term and long-term assessment is performed. For each of the three modes the near-term and long-term modeling approaches are discussed in the following sections.

### 3.3.1 Los Angeles (LA) Sedan

#### 3.3.1.1 Vehicle

The base LA sedan is a 3,300 lb. automobile similar to a Toyota Camry. The conventional gasoline vehicle is modeled with a fuel economy of 35 miles per gallon, consistent with near-term Corporate Average Fuel Economy standards. There are several challenges when identifying a representative fuel economy for a competing automobile trip. First, while the Orange line started operation in 2005 and the Gold line 2003, evaluating the sedan with a typical fuel economy in these years is not a useful comparison against transit systems that will last

decades. Next, it is likely that some vehicles will have lower fuel economies and some higher (e.g., hybrids). Lower fuel economies would include older vehicles, vehicles that were not required or chose not to meet 2020 standards, and even congestion effects. Congestion effects for Los Angeles automobiles are important when vehicles are operating in stop-and-go traffic. While the cumulative distribution may produce some average speed, in reality the vehicle may have spent time above or below this speed. Below 40 miles per hour, the lower the speed, the more fuel is consumed and emissions produced per VMT [Chester et al. AE 2010, Ross 1994]. If congestion worsens in Los Angeles then average vehicle speeds will decrease. As fuel economies improve, it is difficult to say without additional study the extent to which congestion-affected fuel economy will change.

Given the extended lifetimes of the transit systems, a long-term future automobile that achieves 54 miles per gallon is also considered [Chester and Horvath 2012]. To meet the 54 mile per gallon standard, lower vehicle weights will likely be needed. A 2,000 lb. automobile is modeled for this future vehicle reducing manufacturing effects.

Vehicle and battery manufacturing energy use and air emissions are determined using the GREET2 (2012) model. The sedan is estimated to travel 160,000 miles in its lifetime and manufacturing is assumed to occur in an average U.S. electricity mix to capture the possibility of vehicle import to Los Angeles from a generic U.S. manufacturing location. It is assumed that two battery replacements will occur during the vehicle's lifetime and current lead-acid battery technology is evaluated. Replacement battery manufacturing is assigned to the vehicle maintenance life cycle grouping. Furthermore, transport from the manufacturing plant to point of sale/use is included assuming a distance of 2,000 miles by a Class 8b heavy duty truck.

Operational emissions include gasoline fuel combustion, brake wear, tire wear, and evaporative VOC losses. The LA sedan is evaluated with CA Reformulated Gasoline (CARFG). Automobile PM emissions from brake and tire wear have been shown to produce non-negligible health impacts and are included. Furthermore, the volatilizing of liquid gasoline to gaseous form when it escapes from fuel tanks in the form of VOCs is also included. CA-GREET1 (2009) is used to more accurately capture California conditions.

Vehicle maintenance includes general maintenance (parts replacement, general servicing), tire replacement, and battery replacement (previously discussed). The American Automobile Association reports that in 2010, maintenance costs were \$4.29 per VMT and tire costs \$1.11 per VMT [AAA 2011]. Evaluating these costs within EIOLCA (2011)'s *Automotive Repair and Maintenance* and *Tire Manufacturing* sectors produces maintenance impacts from general maintenance services and parts production, and the production of tires. Following Chester and Horvath (2009), automotive repair shop emissions are included, based on the California Air Resources Board's 1997 Consumer and Commercial Products Survey (see Chester (2008) for additional discussion).

The provision of vehicle liability insurance including energy for administrative facilities and waste generation produces significant emissions in the vehicle life cycle [Chester and Horvath 2009]. AAA (2011) reports that in 2010 insurance costs for a medium size sedan were \$948 per

year. Evaluating this cost within EIOLCA (2011)'s *Insurance Carriers* sector allows for the determination of energy use and emissions from the physical insurance infrastructure.

### 3.3.1.2 Infrastructure

An automobile trip that is substituted for an Orange or Gold Line trip reduces onroad infrastructure dependence in the long-term. Onroad infrastructure includes roadway construction and maintenance, roadway operation, parking, and associated roadway worker requirements. While all of these groupings are considered, there is a necessary distinction between average and marginal effects. The removal of a single automobile trip does not result in transportation engineers reducing road capacity and therefore reconstruction, maintenance, or new construction requirements. The reduction in capacity may occur in the long-term as new roadways in fringe areas are avoided or lanes are taken over for BRT or LRT. Assessing life cycle effects as average or marginal is important for deciding which components actually occur because of a decision to build and operate a public transit line. To understand the full environmental effects of a technology, it is necessary to start with average effects. While average effects are reported for Phase 1, marginal effects are determined in the Phase 2 consequential assessment.

Roadway construction and maintenance for the 21 mile trip are evaluated with PaLATE (2004) and coupled with VOC and PM<sub>2.5</sub> emissions [Chester et al. ERL 2010a, Chester 2008]. The automobile trip would likely include local, collector, and arterial roadways. A typical Los Angeles collector is evaluated with asphaltic cement with a width of 32 feet and depths of 6 inches for the wearing layers and 12 inches for the subbase. This width includes only the traveled way and excludes multi-purpose area for parking (parking effects are evaluated independently). The road is assumed to have a lifetime of 10 years for the wearing layers and 50 years for the subbase. While routine roadway maintenance is determined, its energy use and emissions are not allocated to the automobile. Damage to roadways occurs based on a fourth-power relationship to axle loads [Huang 2004]. This means that roadway damage is the result of large vehicles, particularly freight trucks. Roadway capacity on the other hand is dictated by automobile demand and therefore construction effects should be attributed to the sedan.

Roadway operation effects are also modeled. Herbicide use is assumed to be negligible given a general lack of roadside greenery. Lighting is evaluated based on data from nationwide roadway lighting estimates [Chester 2008]. Nationwide estimates include urban and rural roads and applying these factors to Los Angeles is expected to produce a conservative estimate since the collector we consider is fully lit.

Parking spaces are generally grouped as curbside (onstreet), surface (offstreet), parkade (or multi-story garage), or home driveway or garage. Following Chester et al. ERL (2010a), an energy and emissions inventory is determined for each parking space type. The multi-use nature of asphalt surfaces produces challenges for evaluating parking effects in regions or along roadway segments. By first establishing the per-space inventories, several scenarios can be considered in later analyses. This includes evaluating parking spaces along the 21 mile trip as well as the marginal effects of a single trip shifted from automobiles to the Orange or Gold lines.

### 3.3.1.3 Energy Production

The lifetime use of CARFG by the sedan is evaluated from raw material extraction through delivery to the point of sale. Crude oil extraction, transport, refining, and additives are evaluated with CA-GREET1 (2009) assuming a 9.4 percent mix of oil sands. With refineries located near major population centers in California, a delivery distance of 30 miles is used to capture fuel tanker transport from the refineries to refueling stations [CA-GREET1 2009].

## 3.3.2 Los Angeles Metro's Orange Line

### 3.3.2.1 Vehicle

The Orange line uses 60 foot articulated buses manufactured by North American Bus Industries (NABI). The buses have Compressed Natural Gas (CNG) engines and can seat 57 passengers [Callaghan and Vincent 2007]. There are approximately 200 "Metro Liner" buses in the fleet, with each weighing 48,000 lbs unloaded and can operate up to 60,000 lbs at full passenger loads [LA Metro Personal Communications 2011 Note A]. For vehicle manufacturing energy use and emissions, the Ecoinvent (2010) *Bus Manufacturing* process is used. Ecoinvent (2010) provides estimates for an 18 Mg Volvo 8500 bus manufactured in the European electricity mix. To determine the manufacturing effects of the Orange line buses, energy and emissions are scaled with weight and manufacturing location-specific electricity mixes are applied. LA Metro uses conventional lead-acid batteries weighing 51 lbs with an expected lifetime of 13 months in Orange line buses [LA Metro Personal Communications 2011 Note D]. Bus manufacturing occurs in Hungary and Anniston, Alabama. NABI relies on Hungarian manufacturing for certain components and ships these components for final assembly to Anniston. After final assembly, buses were driven to Los Angeles, a distance of 2,100 miles. 54 percent (by weight) of the bus are shipped by ocean going vessel from Hungary to Alabama, a distance of 5,000 miles [LA Metro Personal Communications 2011 Note A]. LA Metro expects buses to last 15 years and would not consider replacing them before 12 years [LA Metro Personal Communications 2011 Note C].

No emissions testing of the Orange line buses exists so information from the California Air Resources Board's Mobile Source Operations Division coupled with a review of emissions testing results for similar buses are used. The Air Resources Board has recently completed testing of similar engines and has established new certification standards for future engine technology [CARB 2000, Gautam et al. 2011]. These tests and results are used and are validated with existing literature. Several CNG buses have been deployed in the past decade around the U.S. including New York City and Washington DC. Touted as a cleaner fuel than diesel, a body of literature has emerged to quantify the tradeoffs of each and conditions in which CNG outperforms diesel. Synthesizing the CNG bus literature [NREL 2006, NREL 2005, ICCT 2009, Nylund 2004, Ayala et al. SAE 2003, Ayala DEER 2003, Ayala et al. 2002, Clark et al. 1999, Kado et al. 2005, Lanni et al. 2003], a range and characteristics of energy use and emissions are determined and used to guide the estimation of Orange line emissions. In the long-term, it is assumed that Orange BRT buses will achieve fuel economies consistent with best available technology buses today (effectively a 23 percent improvement from today's buses) and that the CARB 2020 certification standards are met which require 75-85 percent reductions in air pollutants

Brake and tire wear are included from EPA Mobile6 (2003). Brake wear produces 13 mg PM<sub>10</sub> and 3.7 mg PM<sub>2.5</sub> per VMT. Tire wear produces 12 mg PM<sub>10</sub> and 5.4 mg PM<sub>2.5</sub> per VMT.

Maintenance includes general servicing, tire replacement, battery replacement, and vehicle repair facility processes. Evaluating CNG buses in the Washington Metropolitan Area Transit Authority's fleet, NREL (2006) reports maintenance costs between €52 and €58 per VMT, including tire replacement. Tire-specific replacement costs are evaluated independently from NREL (2006) and are determined from the NTD (2009), based on Metro's total bus fleet, at €79 per VMT. These costs are evaluated with within EIOLCA (2011)'s *Automotive Repair and Maintenance* and *Tire Manufacturing* sectors to determine energy use and emissions from these maintenance activities. Following Chester and Horvath (2009), vehicle repair shop CO<sub>2</sub> and VOC emissions are determined from statewide inventories reported by the California Air Resources Board's 1997 Consumer and Commercial Products Survey (see Chester 2008 for additional discussion) allocated by vehicle VMT.


The provision of fringe benefits for bus operators and liability insurance requires energy and produces emissions in the insurance infrastructure. Combining fringe benefit and casualty and liability cost data reported for Metro buses in NTD (2009) with employee counts produces per bus annual costs. For a single bus in one year, operator fringe benefits amount to \$39,000 and casualty and liability insurance costs \$4,300. These costs are evaluated with the *Insurance Carriers* sector of EIOLCA (2011).

### 3.3.2.2 Infrastructure

The Orange line infrastructure is approximately 19 miles of two-way road, landscaping, and a bike path in North Hollywood. The BRT system is primarily East-West connecting North Hollywood (and the Red line metro) with the Woodland Hills neighborhood. The line commenced service in 2005 and was constructed on existing Southern Pacific Railroad right-of-way.



Figure 1: Los Angeles Metro Orange Line Route Map

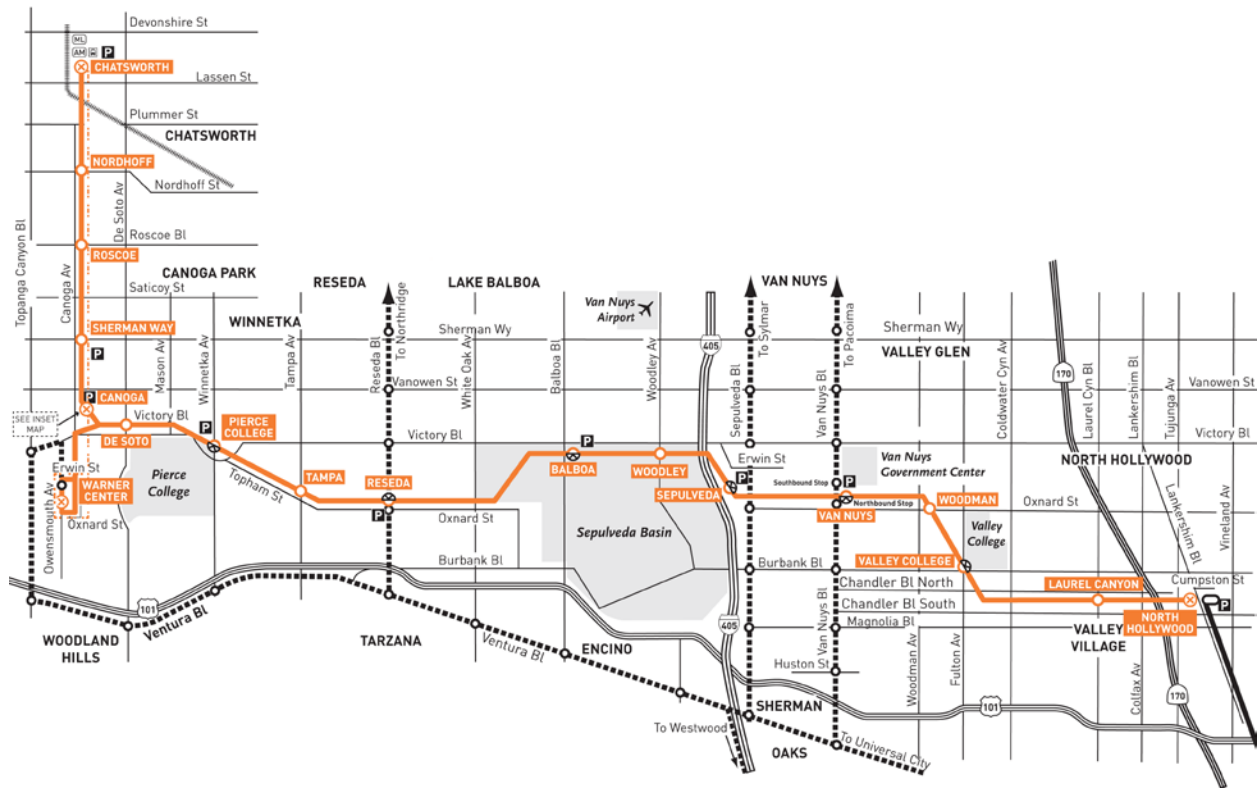

Source: LA Metro Orange (2011).

There are 19 stations in the Orange line system. Stations are fairly minimal with a raised concrete platform from the roadway, approximately 15 feet in width and 200 feet in length, with awnings for weather protection (see Figure 2).

**Figure 2: Typical Orange Line Station and View of Roadway**




Photo by Mikhail Chester on April 6, 2011, Van Nuys station.

Roadway construction and maintenance are evaluated by asphalt and concrete segments. For the entire dedicated bus right-of-way, a subbase with dimensions of 24 feet width and 12 inch depth is applied. The last mile (Canoga Station to the Warner Center Transit Hub) of the bus system uses city streets. Because roadway construction is dictated by automobile throughput, this segment is not allocated to the Orange line. The traveled-way and turnoffs at each station are concrete, each approximately 550 feet in length. As a result, only a small portion of the total dedicated bus right-of-way are concrete. These wearing layers are evaluated with a 20 feet width and 6 inch depth. The subbase and wearing layers are evaluated with the PaLATE (2004). The subbase is specified with a 100 year lifetime, asphalt segments 20 years, and concrete 15 years. The subbase is constructed with recycled materials [LA Metro Personal Communications 2011 Note F] and the PaLATE (2004) material production life cycle component is assumed to be zero so only materials transport and subbase installation equipment are accounted for. Opening for service in 2005, the initial construction of the Orange line used traditional asphalt for the respective segments. Due to greater than expected wear, Metro resurfaced these segments shortly after initial operation using Superpave asphalt. Superpave is an asphalt program for the improved selection of component materials, asphalt mixture design, analysis, and pavement performance prediction, to control stiffness at high temperatures and reduce fatigue cracking at intermediate temperatures ultimately improving wear and increasing the surface lifetime [FHA 1995]. The initial paving is included in the infrastructure construction life cycle component. The Orange line also includes dedicated bike paths and greenery on one or both sides of the traveled way. The Class 1 bike paths are often separated from the road by roughly 20 to 60 feet of landscaping. Bike path construction energy and environmental effects are not allocated to the Orange line. The paths and greenery provide visual, aesthetic, community enhancement, and natural barriers, all of which are not primarily aimed at the functionality of the Orange line.

Also, the benefits of these qualities are realized primarily by bicyclists, pedestrians, and the surrounding homes. It is acknowledged that the bike paths would not exist without the Orange line. Furthermore, they likely provide additional energy and environmental benefits from motorized trips shifting to biking and walking. However, these additional benefits are not captured in this analysis.

Orange line stations are evaluated as bus turnoffs from the traveled-way, and platforms. Bus turnoffs are approximately 200 feet long and 10 feet wide with concrete wearing layers. Their depth is specified as 6 inches, consistent with the traveled-way, and a subbase of 12 inch depth is used. It is estimated that each station has two turnoffs, a total of 28 inches the system. For each station, elevated from the roadway are rider platforms, also 200 feet long and 10 feet wide, primarily concrete material. These platforms are modeled with a 12 inch depth.

**Figure 3: Orange Line Section at Topham Street**

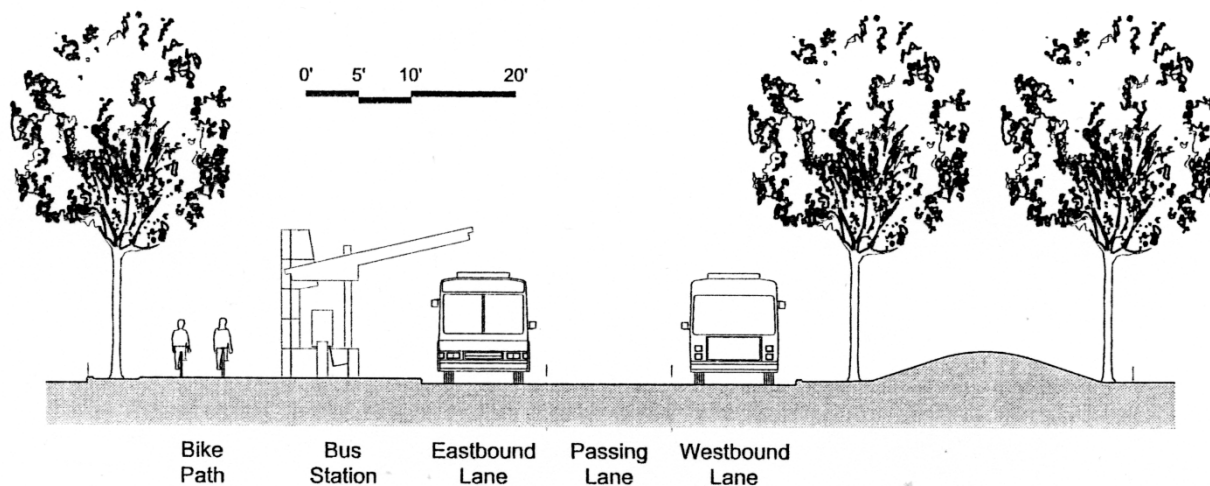

Source: LA Metro Orange (2000).

The Orange line operates roughly 22 hours per day requiring nighttime lighting of the roadway [LA Metro Orange 2011]. In 2010, 1.2 GWh of electricity was consumed for infrastructure operation including roadway, station, and parking lot lighting [LA Metro Personal Communications 2011 Note B]. This electricity was purchased from LADWP and is evaluated in the current LADWP mix for baseline infrastructure operations emissions [LADWP 2011]. Water for landscaping around the traveled-way is evaluated but ultimately excluded from the system boundary because greenscape effects are allocated to bicycling, walking, and the homes around the line. LA Metro planted xeriscape vegetation resulting in minimal water and landscaping requirements [City of Los Angeles 2011]. Assuming that landscaping requires 6 inches of water per year, based on data reported by McPherson (1990) for arid urban environments, water effects (determined from Stokes and Horvath 2009) would be negligible in the life cycle of the Orange line.

There are 4,709 park and ride surface lot spaces at Orange line stations [LA Metro Orange 2011]. Using the approach from Chester et al. ERL (2010a) and the PaLATE (2004) model, surface lot

construction and maintenance energy use and emissions are determined. A 20 year lifetime is assumed for the parking infrastructure.

### 3.3.2.3 Energy Production

CNG use by the Orange line includes extraction, processing, transport, and compression. Orange line natural gas consumption is evaluated with CA-GREET1 (2009) which evaluates all major components involved with natural gas production and use. To evaluate Orange line specific consumption, recovery, processing, and long-distance transmission are first evaluated as the fuel feedstock. Short distance delivery to Metro refueling stations is captured as well as compression of natural gas using electricity. While Metro has traditionally used natural gas-fueled compressors to produce CNG, they are in the process of switching to electrical compressors. Compression energy of 8.2 kWh per mmBTU is applied for this final step [CA-GREET1 2009].

## 3.3.3 Los Angeles Metro's Gold Line

### 3.3.3.1 Vehicle

The Gold line operates AnsaldoBreda P2550 and Siemens P2000, the latter of which are being transitioned to other lines. The AnsaldoBreda trains are used for the analysis of vehicle life cycle components and are not expected to produce significantly different results than an analysis of the Siemens trains. The Italian-made AnsaldoBreda P2550 Gold line trains are six-axle articulated light rail vehicles with steel structures and dimensions of 8.7 feet width by 90 feet length [AnsaldoBreda 2011]. Trains weigh 54 metric tonnes and can seat 76 passengers [AnsaldoBreda 2011]. Manufactured in Italy, shipment at 10,000 miles by ocean going vessel was evaluated [GREET1 2012]. Train manufacturing energy use and emissions were evaluated with SimaPro (2012)'s light rail train processes in an Italian electricity mix. A 30 year lifetime is assumed for trains.

LA Metro does not collect propulsion energy consumption information so electricity consumption of 10 kWh per VMT reported for aggregated LA Metro LRTs is used [NTD 2009]. In addition to the Gold line, LA Metro operates the Blue and Green LRT lines. The Blue line currently uses Nippon Sharyo trains and the Green line Siemens P2000. The aggregate electricity consumption factor is assumed to be a reasonable approximation for the Gold line because of the similarity in train size and models. Furthermore, the electricity consumption factor is similar to those reported for other AnsaldoBreda trains [Chester and Horvath 2009]. Additionally, when system-wide annual Gold line propulsion electricity is calculated, the energy consumed corresponds with the total electricity (vehicle propulsion plus infrastructure operation) reported by LA Metro (this is discussed in the *Infrastructure* section). The propulsion energy consumption and corresponding power plant emissions are assessed and reported separate from the *Vehicle Operation* life cycle component. This accounting is different from previous electric train LCAs [Chester and Horvath ERL (2010b), Chester and Horvath (2009), Chester (2008)].

Vehicle maintenance impacts include servicing of trains, cleaning, and replacement of flooring. General servicing maintenance (replacement of glass, fabric, aluminum, copper, steel, paint, and plastics in standard wear and tear) is evaluated with SimaPro (2012) in a City of Pasadena

Water and Power 2008 electricity mix [PWP 2009]. Daily cleaning of trains including electricity use and cleaning supplies is considered. The replacement of composite flooring for the 660 ft<sup>2</sup> of train passenger area is included at a lifetime of 20 years.


Operator fringe benefits and liability are evaluated for vehicle insurance. Combining fringe benefit and casualty and liability cost data reported for Metro light rail trains in NTD (2009) with employee counts produces per vehicle annual costs. For a single train in one year, operator fringe benefits amount to \$4,239 and casualty and liability insurance costs \$13,576. These costs are evaluated with the *Insurance Carriers* sector of EIO/LCA (2011).

### 3.3.3.2 Infrastructure

The Gold line infrastructure consists of 19.7 miles of two-way track and 21 stations. The line starts in East Los Angeles, travels through Union Station in downtown Los Angeles, and ends in Pasadena (see Figure 4). The current infrastructure is phase one of several potential extensions. Ultimately, Pasadena would be connected with Ontario airport, a distance of roughly 30 miles. The current infrastructure is assessed and we do not estimate the effects of potential future extensions.

The infrastructure assessment is fundamentally an engineering analysis that estimates material use and processes involved with each life cycle component. Given the unique design attributes and large-scale nature requiring many design and construction actors of rail transit infrastructure construction, it is generally the case that detailed total construction inputs are consolidated. The approach for estimating energy inputs and emission outputs from construction materials and processes is reported in extensive detail by Chester and Horvath (2009) and Chester (2008). Additional refinement is reported by Chester and Horvath (2012). While the methodology, material data, and process data in this study are consistent with those developed in the aforementioned study, the infrastructure design, operational requirements, and maintenance requirements are unique.

**Figure 4: Los Angeles Metro Gold Line Route Map**

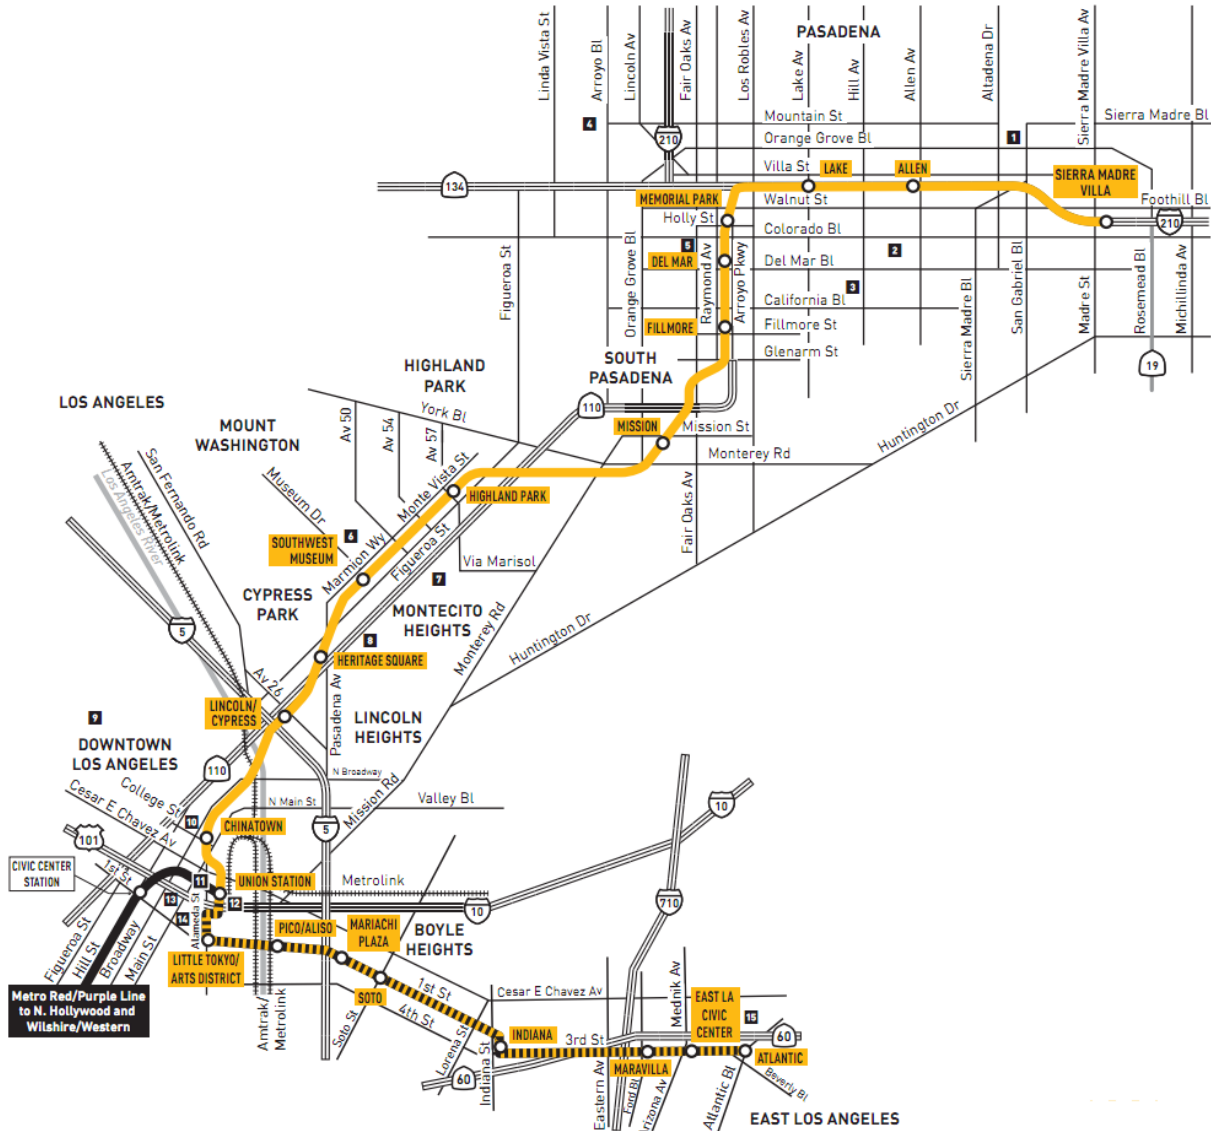

Source: LA Metro Gold (2011).

Of the 21 current stations, one is aerial (Chinatown), one is below grade (Memorial Park), and the remainder are at-grade. Satellite imagery was used to evaluate the dimensions of stations [Google Earth 2011]. In general, station platforms are roughly 300 feet in length and 10 to 27 feet wide. The aerial station platform is 300 feet in length and 25 feet wide. The platform slab is evaluated with a 3 feet depth. The columns and elevated track are not allocated to stations but to the aerial track segments. For the below grade station, platforms, floor caps, footings, structural columns, and walls are included. A roof cap is not considered since this station has a transit oriented development apartment structure above. The Memorial park station is evaluated with a 330 feet length, 50 feet width, and 30 feet height, with all primary structure



elements evaluated as reinforced concrete. At-grade stations are treated as simple platforms with an average length of 330 feet and width of 15 feet [Google Earth 2011]. The platforms are evaluated a structural steel-reinforced concrete with a depth of 3 feet (see Figure 5). An additional 3 feet subbase is also implemented. The inclusion of ancillary infrastructure like buildings, other structures (e.g., walkways, coverings), and fixtures are not included due to lack of data and would only increase the inventory effects. The tracks themselves through stations are not attributed to the station but to the track infrastructure life cycle components. Excavation activities are attributed to the track. There are 2,334 dedicated parking spaces across the Gold line stations [LA Metro Gold 2011]. All spaces are treated as surface lots and evaluated with PaLATE (2004). This is likely a conservative estimate as parkade or garage spaces have greater effects than surface lots.


**Figure 5: Typical Gold Line Platform Station**



Photos by Mikhail Chester on April 6, 2011.

Track segment materials and processes are evaluated by engineering segment type: aerial, elevated on fill, open cut, and at-grade. For each segment type, aggregate, concrete, and steel are considered in detail as primary materials, including their associated life cycle effects and placement processes. Soil work construction activities are also included for excavation and amendments. The use of wiring and electrical equipment for power delivery, train control, and signaling is also included. For all materials, raw material extraction through production and delivery are modeled. Using Google Earth (2011) it is estimated that there is one mile of elevated structure, one mile of elevated on fill, two miles of open cut, and the remainder of track segments at-grade.

**Figure 6: Gold Line Aerial Track Segment**

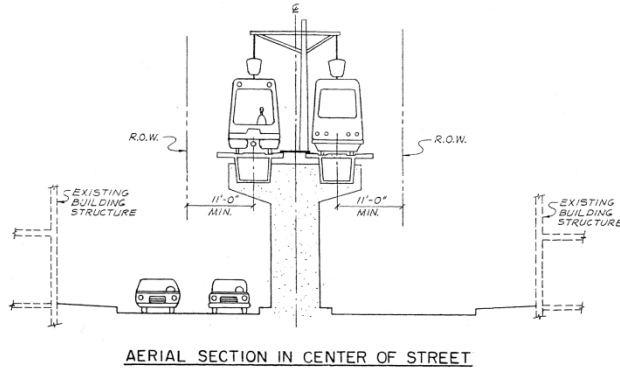


Source: LACTC (1988) and Google Earth (2011).

An engineering design takeoff is performed for each segment type. For aerial segments, both supports and platforms are evaluated. Supports are placed every 100 feet and are designed at a minimum height of 11 feet, and cross sectional area of 15 square feet [LACTC 1988, Google Earth 2011]. Support footings and piers are included. The two-way tracks are supported at the pier and have a cross sectional area of 50 square feet each. Figure 6 shows an aerial segment near the Chinatown station.

The assessment of elevated on fill and open cut segments include earthwork activities in addition to the aforementioned factors. Retained filled segments are designed with a cross sectional area of 390 square feet. For open cut segments, and excavation volume cross sectional area of 300 square feet is used. Structural concrete volumes are determined from engineering drawings [LACTC 1988]. Retaining walls and concrete bases are included (see the designs in Figure 7 and Figure 9).

**Figure 7: Retained Fill and Open Cut Gold Line Segments**

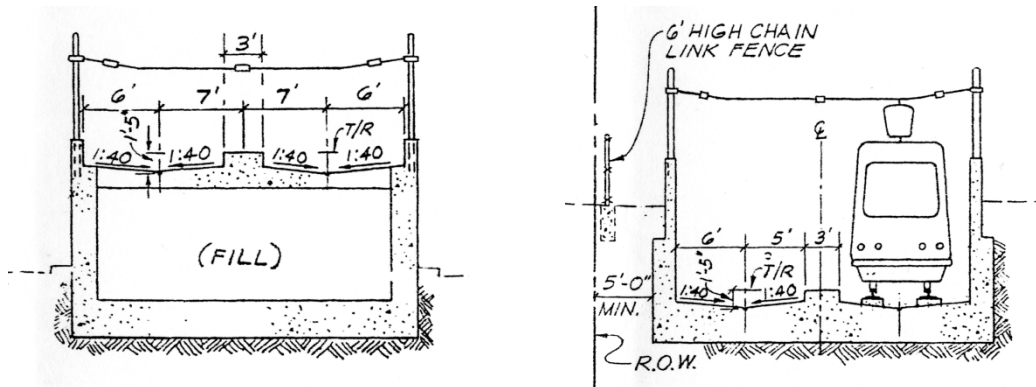

Source: LACTC (1998).

At-grade segments are generally ballasted track but some segments are integrated with local roadways serving as the median (see Figure 8 and Figure 9). For ballasted segments, width of 26 feet and depth of 20 inches is used. For concrete segments serving as roadway medians (see Figure 8), a subbase of ballast is used followed by a concrete covering with a cross-sectional area



of 26 square feet. Concrete ties are evaluated where applicable and assumed to be every 24 inches on center.

**Figure 8: At-Grade in Roadway Median Gold Line Track Segment**



Photo by Mikhail Chester on April 6, 2011.

Power structure and substations are determined from existing light rail literature (see the discussion in Chester 2008). These components are evaluated based on their initial costs with the EIO/LCA (2011) *Other Communication and Energy Wiring Manufacturing* and *Electric Power and Specialty Transformer Manufacturing* sectors.

**Figure 9: At-Grade in Freeway Median Gold Line Track Segment**



Photo by Mikhail Chester on April 6, 2011.

LA Metro tracks electricity consumption at meters generally located at stations or maintenance yards. Gold line electricity is purchased from LADWP, PWP, and SCE and is not disaggregated to propulsion and non-propulsion uses. In 2010, 27 GWh of electricity were consumed including 5 GWh at Union Station which serves both the Gold and Red lines [LA Metro Personal Communications 2011 Note B]. LA Metro gathers monthly station, traction power, signals,

crossings, and maintenance yard electricity data from meters. Assuming that one-half of Union Station's electricity consumption can be attributed to the Gold line results in 20 GWh of electricity purchased from LADWP, 3.2 GWh from PWP, and 1.2 GWh from SCE. Stations are responsible for 15 GWh of the 27 total GWh electricity consumed.

Station and track maintenance are evaluated including routine replacement of materials and associated reconstruction activities. For stations, it is assumed that roughly 5 percent of concrete, steel, and power/electrical components are replaced each year. Station cleaning is also included. Track maintenance is evaluated with SimaPro (2012)'s light rail train track maintenance processes. Track maintenance includes energy use and emissions for maintaining and replacing materials as well as the effects of herbicide and lubricant use.

Non-operator fringe benefits are evaluated for infrastructure employee insurance. Combining fringe benefit cost data reported for Metro light rail trains in NTD (2009) with employee counts produces per vehicle annual costs. For a single train in one year, non-operator fringe benefits amount to \$46,918. This cost is much larger than the operator per-vehicle cost because it captures the many employees needed in the system for the handful of train operators. This cost is evaluated with the *Insurance Carriers* sector of EIOLCA (2011).

### 3.3.3.3 Electricity Production

The LADWP electricity mix, which accounts for 82 percent of total electricity used by LA Metro for the Gold line, is used to evaluate propulsion and infrastructure operation emissions. Current and potential future LADWP electricity mixes [LADWP 2011] are used to assess vehicle propulsion and infrastructure operation emissions. The future mix is LADWP's preferred energy portfolio for meeting Renewable Portfolio Standards (RPS) in 2030 [LADWP 2011]. The RPS mix is used to model a Gold line train that may operate with clean electricity in the coming decades. The mixes are shown in Table 4.

**Table 4: LADWP Electricity Mixes for 2009 and Future RPS**

	Natural Gas	Coal	Nuclear	Hydro	Renewables
2009	31%	39%	9%	7%	14%
2030 RPS	50%	-	9%	4%	37%

The total for each row may not sum to 100 percent due to rounding. Renewables include wind, photovoltaic, geothermal, biogas, and others.

Using GREET1 (2012) electricity upstream and at-plant generation emission factors, life cycle electricity emissions are determined. An 8.4 percent transmission and distribution loss is assumed. As noted earlier, vehicle operation electricity consumption and emissions at electricity generation facilities are assessed in the energy production life cycle component.

### 3.3.4 Functional Unit

Results are normalized per VMT and PMT for the leveled comparison of modes. These life cycle inventories will serve as the basis of our Phase 2 analysis, the development of a consequential assessment of the travel corridors the transit systems serve. Attributional inventories evaluate the full system (in this case the vehicle, infrastructure, and energy production life cycle components) and allocate energy and emissions to the sedan, Orange line, and Gold line per


VMT and PMT. The goal of this approach is to identify and understand the comprehensive footprint of a transportation system to evaluate the critical life cycle processes that should be targeted for energy and emissions reductions by a city, region, or transit agency. When decision analysis is included in life cycle scoping then consequential assessment must be used.

Consequential assessment evaluates what has changed from the status quo and is better suited for informing policy. While understanding the comprehensive footprint with attributional assessment is important for the transit operator or planner to improve the systems, questions related to effects of decisions and policy on the integrated transportation system must be answered with consequential assessment. The Phase 1 attributional results presented here are designed to inform transportation decision makers of the life cycle components that should be targeted for energy and emissions improvements. Attributional (average) results show all life cycle components and assume that a decision to use a transportation mode results in long-term effects including the need to construct, operate, and maintain all aspects of the system. In Phase 2, consequential results are developed to determine the energy and emissions effects to Los Angeles from the decision to construct and operate the Orange and Gold lines (i.e., marginal effects).

Several functional units can be used depending on the question that is being informed and we start with *per VMT*. Using the methodology described, life cycle component energy consumption and emissions are first evaluated with inconsistent temporal resolution. For example, bus manufacturing energy consumption is determined for a vehicle with a 15 year lifetime, bus operation CNG consumption is determined per VMT, and Orange line infrastructure electricity consumption is determined for 2010. The Sedan lifetime VMT is used to normalize vehicle life cycle components. Los Angeles roadway infrastructure components are normalized to a per VMT functional unit based on urban roadway classification VMTs reported by FHA (2008). Using LA Metro's *Scheduled Service Operating Cost Factors Reports* [LA Metro 4-24 2010], all life cycle components are first normalized to a per VMT common functional unit for aggregation. LA Metro 4-24 (2010) reports weekday, Saturday, and Sunday VMT for the Orange and Gold lines as well as the number of vehicles in operation.

A primary goal of passenger transportation modes is to provide mobility for people and the *per PMT* functional unit is the most appropriate functional unit for evaluating this. Normalizing public transit life cycle inventories per VMT produces results that are often an order-of-magnitude larger than automobiles. The per VMT functional unit is useful for evaluating corridor or regional emission profiles but does not provide a ground for comparing the energy and environmental effectiveness of moving individual passengers. Results in Chapter 4 are ultimately normalized to a *per PMT* functional unit to provide a fundamental comparative unit for readers. For the baseline results, the sedan is evaluated with an occupancy of 1.58 passengers [SCAG 2003]. Like any public transit mode, occupancy rates can vary significantly depending on the position on the line and time of day. The Orange line, with 57 seats, is operating with 38 passengers on average. Figure 10 shows how this occupancy changes between time of day and weekdays or weekends.


**Figure 10: Orange Line Bus Occupancy by Hour of Day**

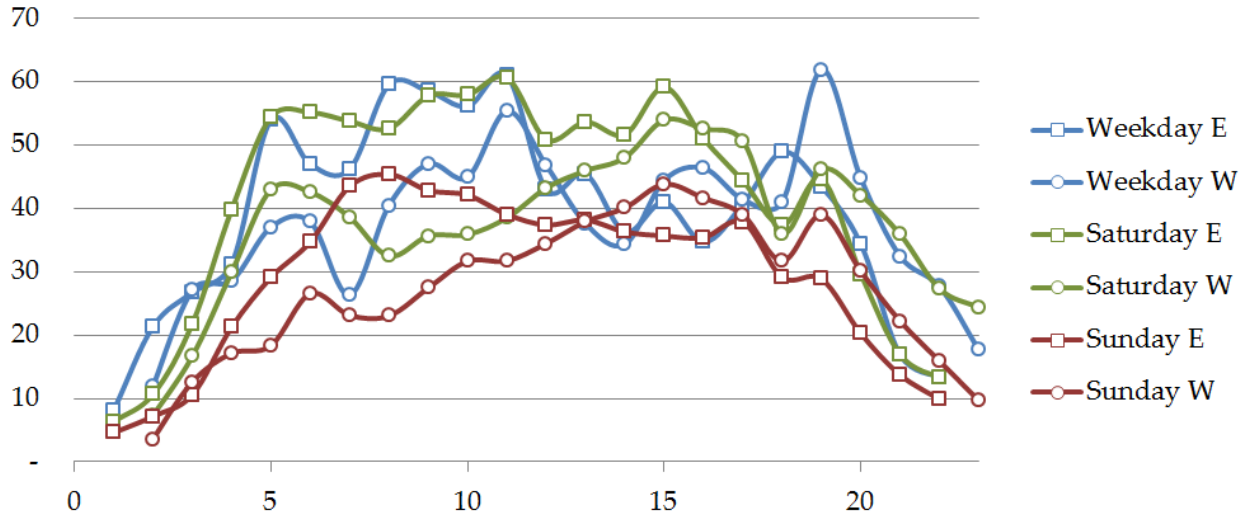

Source: LA Metro Orange Ridership (2011).

Similarly, Figure 11 shows the variations in Gold line occupancy. The median ridership for Gold line trains is 43 passengers [LA Metro Gold Ridership 2011].

**Figure 11: Gold Line Train Occupancy by Hour of Day**

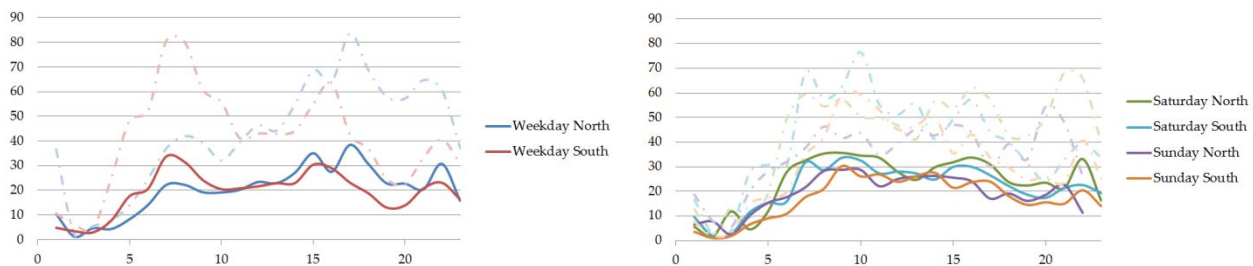

Source: LA Metro Gold Ridership (2011). Solid lines are averages. Dotted lines are maximum observed.

While reporting averages is useful, it masks the variations in ridership that may inform more intelligent policies or decisions, and it implies that modes are universally better or worse than others. Average occupancies are used to report baseline inventory results and the relative contribution of life cycle components in the near-term. It is acknowledged that occupancy variations will change the per PMT results.

Future ridership estimates for the long-term LCA are developed using 2035 forecasts developed by LA Metro [LA Metro Personal Communications 2011]. A polynomial interpolation is used to assess adoption between now and 2035 when an estimated 100 and 130 million annual PMT are delivered by the respective systems. Auto trip purpose characteristics are joined with transit onboard survey results and future forecasts to determine avoided automobile travel. Currently, 25 percent of Orange BRT and 67 percent of Gold LRT previous trip takers would have made the trip by automobile [Flynn et al. 2011, LA Metro Gold 2004]. Given that fuel prices are expected to increase and the transit lines are expanding to auto-dominated regions, may be interconnected with other transit lines, and are anticipated to experience further development,

auto shift forecasts are developed to 2050. Using future trip and station access forecasts from LA Metro, the current auto shift growth rates are extrapolated resulting in a median long-term shift of 52 percent for the Orange BRT and 80 percent for the Gold LRT.



## CHAPTER 4:


### Phase 1 – Modal Results and Interpretation

With the life cycle assessment methodology and functional unit considerations described in Chapter 3, energy use and emissions results per PMT are determined. For each environmental indicator, results are reported and a short discussion is provided of the critical contributing factors in direct and ancillary life cycle processes. The results compare near-term (NT) and long-term (LT) automobiles, Orange line buses, and Gold line trains to capture the uncertainty in future environmental performance of each system. Chester et al. (2013) provides an extended analysis that includes feeder automobile travel to transit stations and trip comparisons.

#### 4.1 Energy Use and GHG Emissions


End-use energy is dominated by vehicle operation but life cycle components can increase inventories significantly. For the sedan and Orange line, Vehicle Manufacturing, Vehicle Maintenance, and Energy Production components are significant contributors to life cycle energy use and GHG emissions (see Figure 12 and Figure 13).

**Figure 12: Life Cycle Energy Use in MJ per PMT**

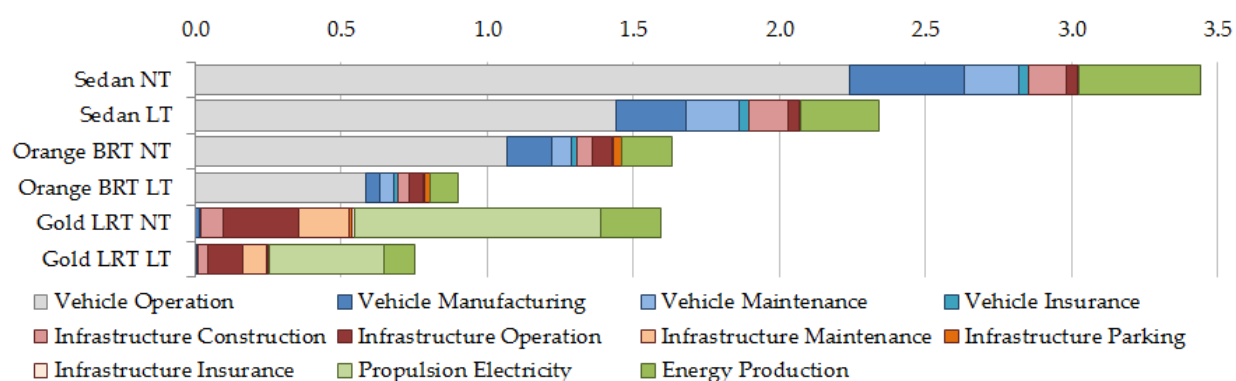

Component production (including raw material extraction through component assembly) contributes roughly 55 percent of energy use and GHG emissions to vehicle manufacturing. Battery manufacturing and final assembly each contribute roughly 15 percent with the remainder of effects attributed to fluid production [GREET2 2012]. Vehicle maintenance effects are the result of general servicing (including parts production and transport, 55 percent of total) and tire replacement (due to associated energy production and carbon black manufacturing, 37 percent of total). Battery production and replacement accounts for roughly 9 percent of total effects. CARFG and CNG production requires upstream raw fuel extraction, processing, and transport activities that contribute an additional 16-19 percent energy use and 25 percent GHG emissions on top of combustion [GREET1 2012]. CARFG relies on a limited market with unique processing requirements and is evaluated with 9.4 percent oil sands sources resulting in larger effects than average US gasoline.

**Figure 13: Life Cycle GHG Emissions in g CO<sub>2</sub>e per PMT**

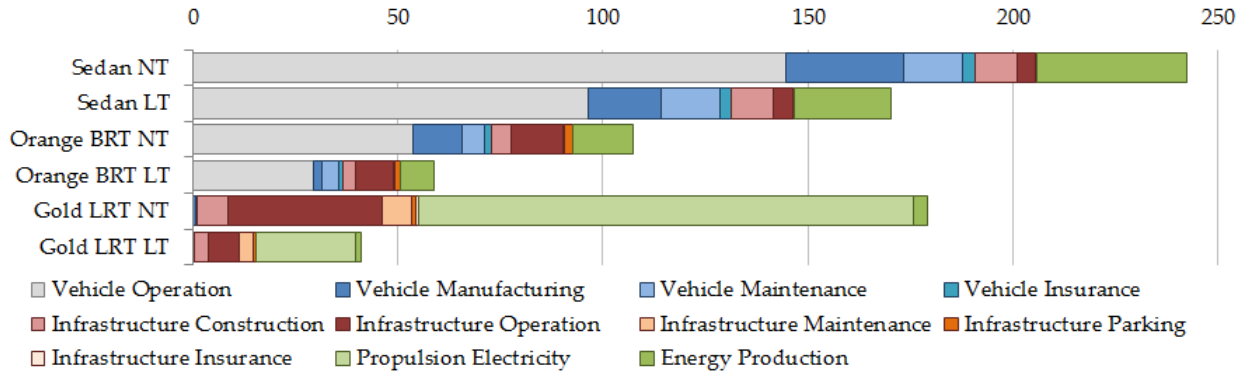


The Gold line shows significant contributions from infrastructure operation which is the result of electricity generation for stations, signaling, controls, lighting, and miscellaneous components. The electricity use is dominated by LADWP consumption which in 2009 relied on 39 percent of primary energy from coal and 31 percent from natural gas [LADWP 2011]. As LADWP divests in these coal sources (in particular the Navajo Generating Station in Arizona and the Intermountain Power Plant in Utah) and brings online more renewables, the carbon intensity of electricity to the Gold line decreases significantly.

## 4.2 Conventional Air Emissions

The conventional air emissions results reveal the importance of including a broad suite of environmental effects in sustainability assessment beyond GHG emissions, as well as the importance of including life cycle components. When comparing the conventional air emissions results, the Orange and Gold lines are often lower emitting per PMT. Per VMT the transit vehicles will generally emit more pollutants than automobiles, however, given their large passenger loads the per PMT results typically favor transit.


**Figure 14: Life Cycle PM<sub>10</sub> Emissions in mg per PMT**

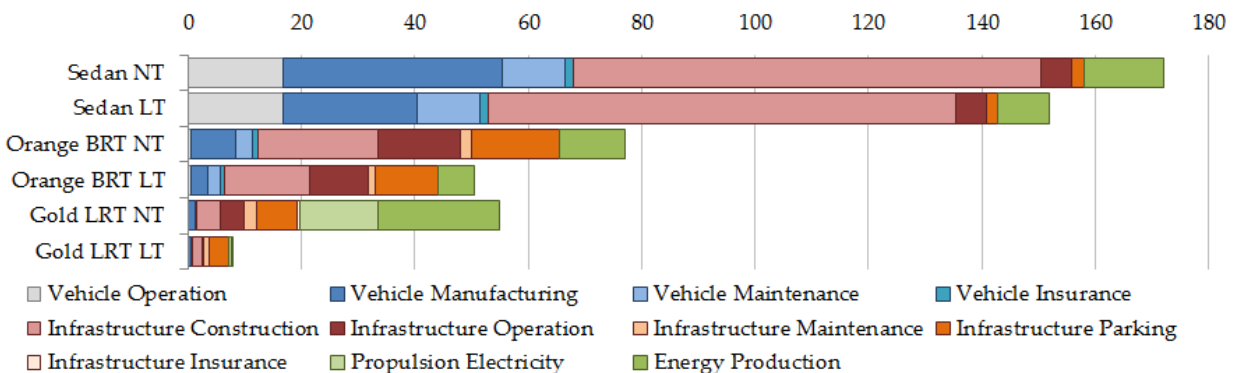

PM<sub>10</sub> emissions are generally the result of mechanical processes but can also be affected by combustion. During material extraction, mining tends to contribute a large share of PM<sub>10</sub> emissions. This is the case for vehicle manufacturing as well as infrastructure construction. For vehicle manufacturing, steel, iron, and aluminum production are the major PM<sub>10</sub> contributors.


For infrastructure construction, aggregate mining for asphalt is a major contributor. PM emissions for the Gold line are significantly diminished as LADWP transitions from the current mix to the RPS. This is due to the significant reductions in coal and natural gas use.

**Figure 15: Life Cycle PM<sub>2.5</sub> Emissions in mg per PMT**

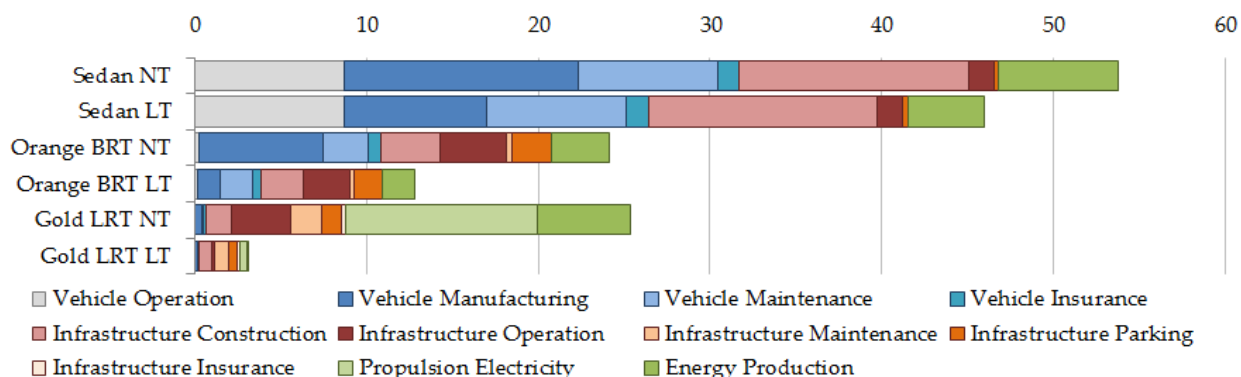

PM<sub>2.5</sub> emissions are often the result of combustion processes. For vehicle manufacturing, steel and aluminum production dominate, the result of furnace operations. Diesel truck fuel combustion in the supply chain of life cycle components is also a common contributor. For vehicle operation, brake and tire wear contribute roughly equivalent per VMT emissions to fuel combustion for the sedan. The Orange line CNG bus produces much lower PM<sub>2.5</sub> emissions per VMT than typical diesel urban buses.


**Figure 16: Life Cycle SO<sub>2</sub> Emissions in mg per PMT**

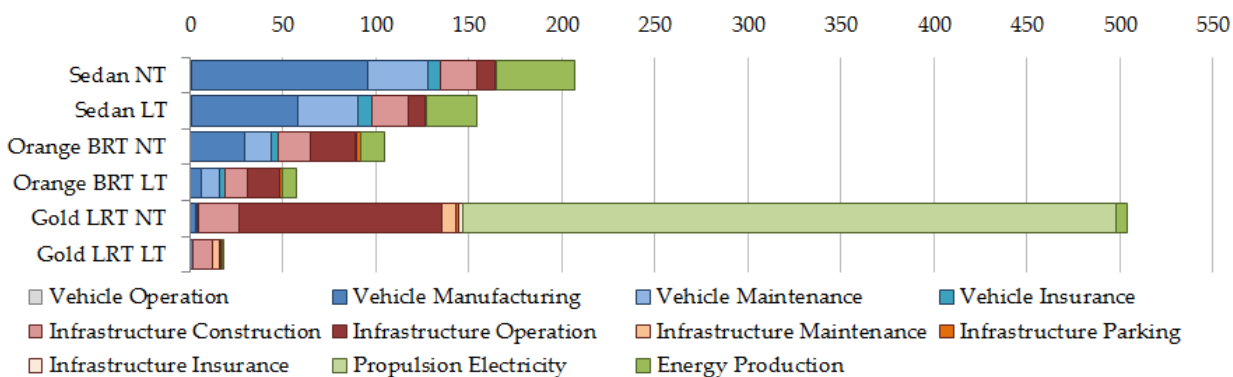

Electricity generation dominates SO<sub>2</sub> emissions throughout the life cycle components. NT Gold line vehicle operation relies on the LADWP electricity mix that includes 39 percent coal resulting in significantly higher SO<sub>2</sub> emissions than the sedan and Orange lines. The transition to an RPS mix eliminates this SO<sub>2</sub> effect for the Gold line. Comparatively, the sedan and Orange lines produce little SO<sub>2</sub> emissions at the tailpipe because of removal of sulfur from gasoline (since it is a poison to the catalytic converter) and the low sulfur content in CNG fuel.




**Figure 17: Life Cycle NOx Emissions in mg per PMT**

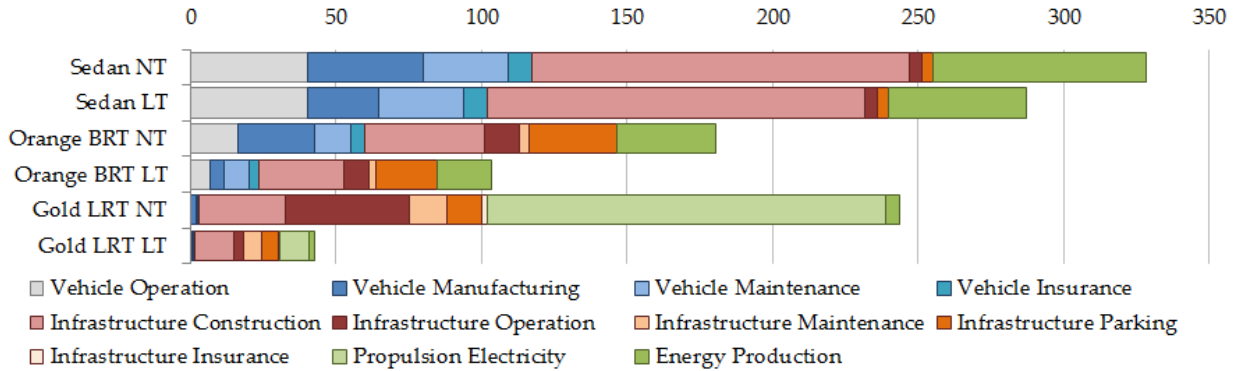


NOx emissions are largely the result of diesel equipment use including truck transport, rail transport, and electricity generation in supply chain processes. For the Gold line, near-term operation produces heavy NOx emissions at coal-fired power plants and these emissions will decrease significantly in the long-term, both from propulsion and infrastructure operation electricity use.

**Figure 18: Life Cycle VOC Emissions in mg per PMT**

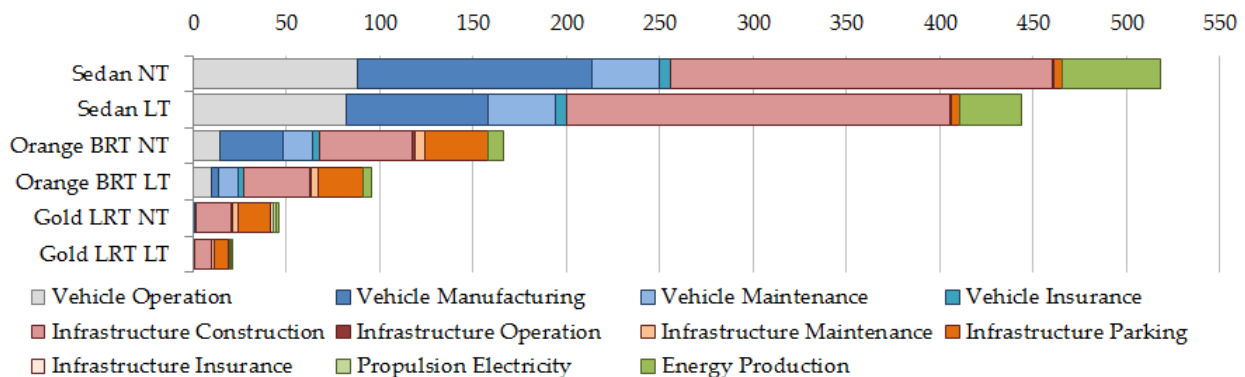

Vehicle operation, vehicle manufacturing, and infrastructure construction dominate VOC emissions. GREET2 (2012) is used to estimate that for a CARFG sedan, vehicle manufacturing VOC emissions are larger than vehicle operation. This is the result of engine oil, power steering fluid, brake fluid, transmission fluid, powertrain coolant, and windshield fluid. For the Orange line, bus manufacturing VOC emissions occur primarily in direct manufacturing processes but also in ancillary truck transport activities. VOC emissions from asphalt and concrete use across the three modes are generally associated with volatilization of organic diluents in asphalt placement, and the release of organics in cement production [Chester and Horvath 2009].

**Figure 19: Life Cycle CO Emissions in mg per PMT**

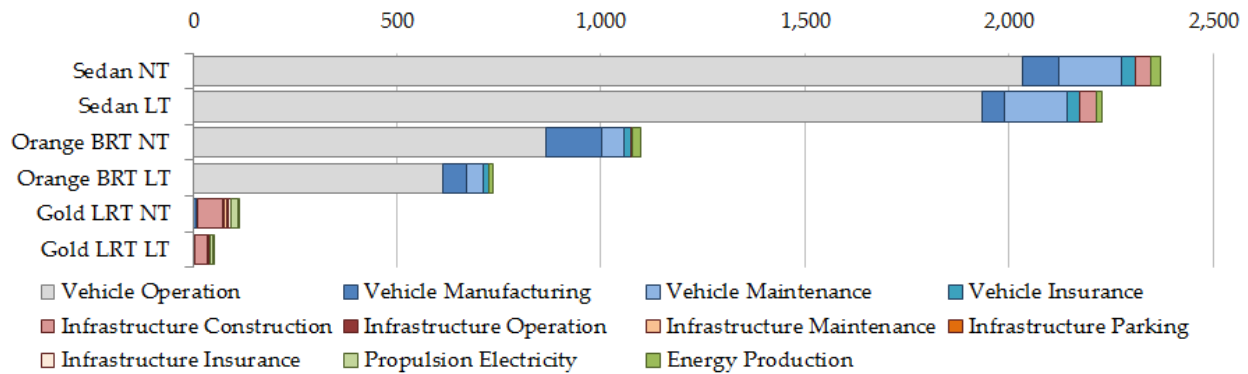

For the sedan and Orange lines, the majority of life cycle CO emissions are associated with vehicle operation, but for the Gold line infrastructure construction has significant impacts. CO emissions in Gold line infrastructure construction are the result of heavy concrete use and its associated truck transportation requirements.


### 4.3 Occupancy Sensitivity

Passenger transportation modes should be evaluated at their occupancy ranges to understand where environmental breakeven points occur and the conditions under which certain decisions promote utilization that achieves long-term environmental gains. The per PMT life cycle results in Figure 12 through Figure 19 evaluate the modes at their average occupancies to emphasize the significance of life cycle components. However, the relative results of a sedan with a single passenger to an Orange line bus with 20 passengers to a Gold line train with 90 passengers produces very different outcomes than the average. Since the Orange and Gold lines are likely to shift trips away from the automobile, the full occupancy range of the sedan can be used to question at what occupancy loads for the transit modes are environmentally better or worse.

The occupancy sensitivity breakeven analysis focuses on near-term vehicle technologies (i.e., the 35 mile per gallon sedan, current Orange line buses, and Gold line trains in the current LADWP electricity mix) to identify the short term adoption goals that should be targeted by transit agencies. It is acknowledged that similar breakeven analyses could be developed for future vehicles.

Figure 20 shows breakeven energy consumption and GHG emissions. For the Orange and Gold lines, the abscissa is the percentage of seats filled. This percentage exceeds 100 percent to capture standing only passengers. The blue shows the sedan's per PMT energy consumption or GHG emissions range from one to five passengers. For example, for energy consumption, a sedan with one passenger consumes 5.9 MJ per PMT in the life cycle, and with five passengers 1.2 MJ per PMT. In the figure the breakeven Orange and Gold occupancies are reported.


**Figure 20: Breakeven Energy Consumption and GHG Emissions**

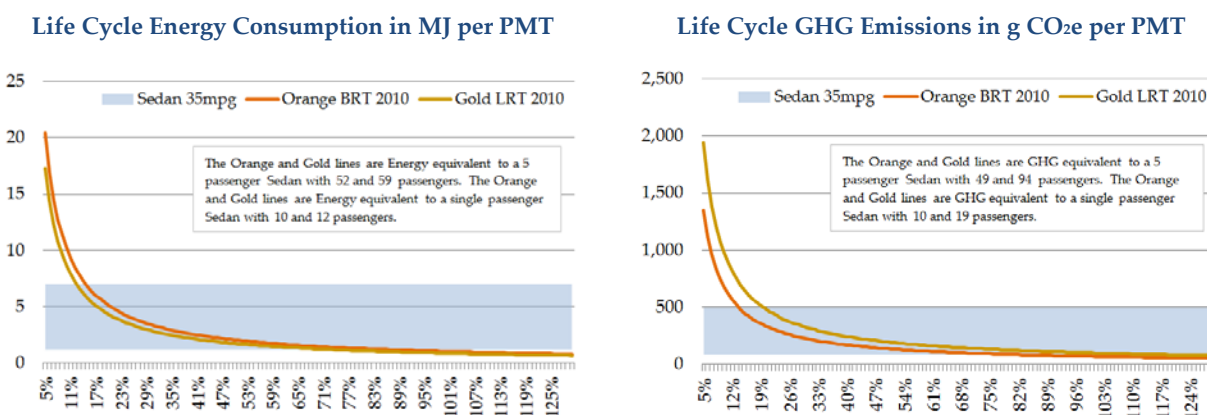

Abscissae are the percentage of Orange or Gold line seats occupied.

The breakeven energy consumption and GHG emissions in Figure 20 show that between roughly 13 and 52 passengers the Orange line is in the competitive range of a one to five passenger sedan. At over 52 passengers, the Orange line will consume less energy and produce fewer GHG emissions per PMT than the sedan in the long-term. While average occupancy for the Orange and Gold lines are 38 and 43 passengers, Figure 10 and Figure 11 show the occupancy distribution and identify when these modes are competitive.


**Figure 21: Breakeven PM Emissions**

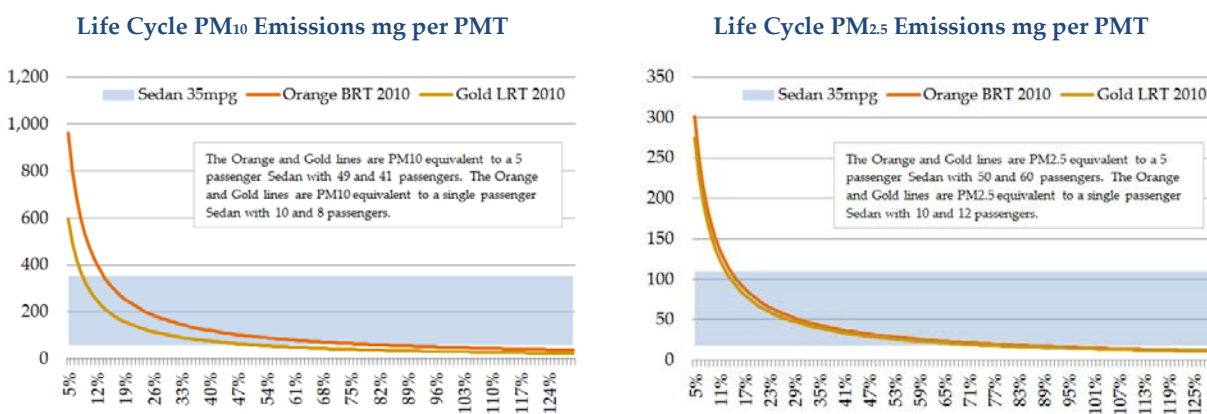

Abscissae are the percentage of Orange or Gold line seats occupied.

Breakeven characteristics are shown for each of the conventional air emissions in Figure 21 through Figure 23.


**Figure 22: Breakeven SO<sub>2</sub> and NO<sub>x</sub> Emissions**

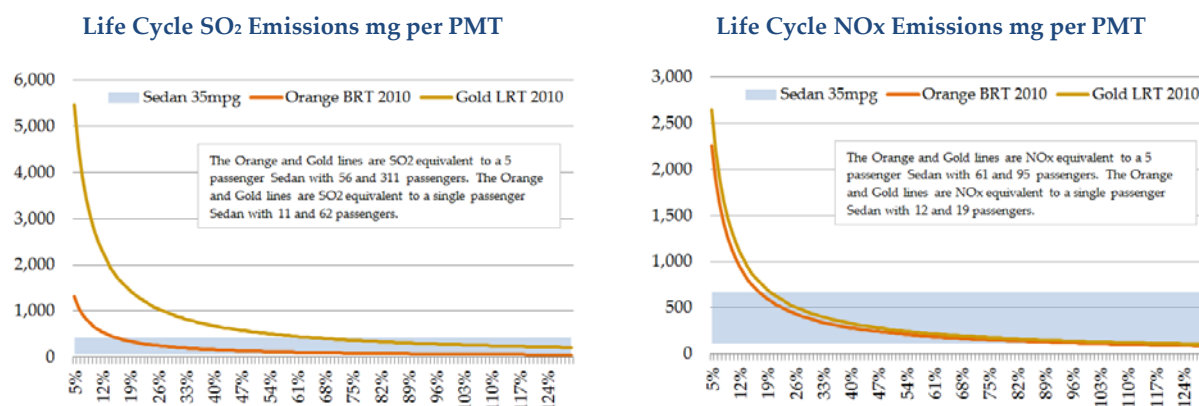

Abscissae are the percentage of Orange or Gold line seats occupied.

When comparing the energy use and emissions per PMT it is important that attributional and consequential characteristics are included. While the breakeven figures may show that at a certain time of day a bus emits more per PMT than a car, the decision maker must recognize that a vested transit system is in place that will run regardless of the passenger's decision to use one mode over another. In this case, the appropriate analysis would not compare the difference in per PMT emissions between the modes but the avoided VMT emissions that did not need to occur by a passenger choosing the public transit mode. This consequential analysis is shown in Phase 2.

**Figure 23: Breakeven VOC and CO Emissions**

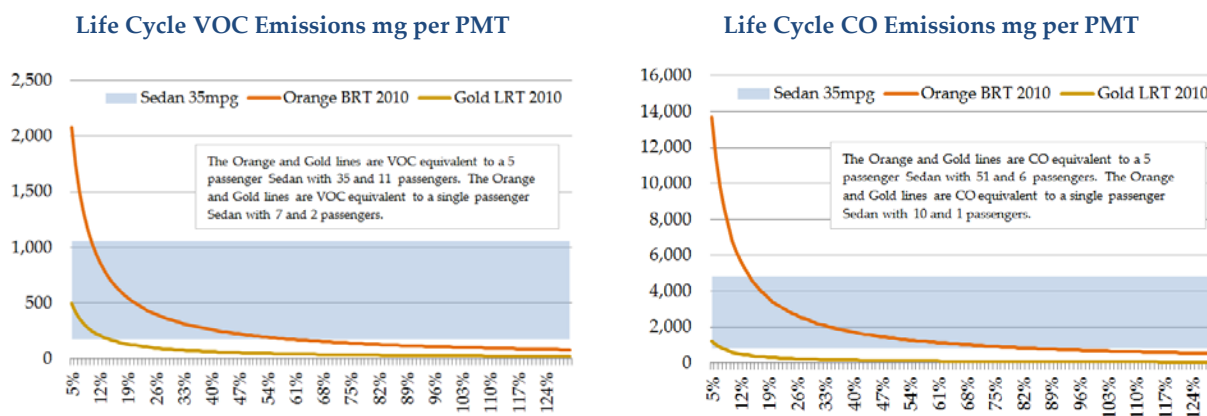


Abscissae are the percentage of Orange or Gold line seats occupied.

## 4.4 Ridership Targets and Environmental Payback

The occupancy sensitivity is valuable for understanding the long-term ridership levels that are needed to breakeven with automobiles; however, it is also important to evaluate the speed at which environmental paybacks occur as a result of mode switching from automobiles to the new public transit modes. Figure 24 shows the payback speed for both the Orange and Gold lines which is dependent on the number of passengers that have shifted from automobiles. The abscissa is a measure of the number of passengers on the Orange and Gold line that would have

previously taken automobiles for their trip. The Orange and Gold lines in Figure 24 show the transition between the latest mode shift data and future projects to facilitate a discussion of adoption strategies for new transit systems.

**Figure 24: Orange and Gold Line Environmental Payback Speed**

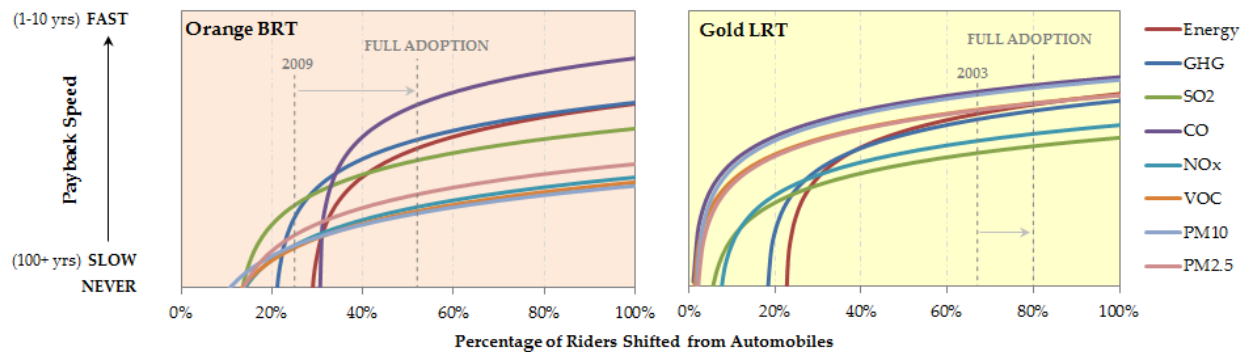

The payback speed sensitivity shows two critical factors for transportation planners. First, minimum shifts from automobiles must be achieved to have environmental paybacks. Second, the payback speed for each environmental indicator is different.

The intersection of the environmental indicator curves with the abscissa show breakeven points, or the minimum percentage of transit trip takers that must have been shifted from automobiles in order to achieve an environmental payback. For the Orange line, the light blue PM<sub>10</sub> curve shows that at around 10 percent of riders having shifted from autos, the new transit mode will achieve a PM<sub>10</sub> reduction (the question is how quickly). For every indicator, the greater the percentage of riders shifted from automobiles, the faster the payback. Energy consumption (maroon) and CO emissions (purple) require the greatest shift in order to achieve some payback, of around 30 percent. The 10 percent to 30 percent range is a valuable metric for BRT planners. The metric says that at 10 percent of riders shifted you will start to achieve environmental paybacks and at 30 percent the new bus system will achieve environmental benefits across all pollutants. For the Gold line the range starts close to zero percent for CO and VOCs and has a maximum of roughly 23 percent for energy consumption and GHG emissions. For both lines, the full adoption forecasts show that the systems will be paying back for all environmental indicators, the question then becomes how quickly.

The payback speed curves for the environmental indicators are different and show that each mode will take a different amount of time to payback for each indicator in the life cycle of the system. For example, the Gold line starts achieving a PM<sub>2.5</sub> payback at around 5 percent and GHGs at around 18 percent. While payback may be possible at low percentages at automobile trip shifts, the payback may be a century or more. For all environmental indicators, the payback speed is monotonically increasing with the percentage of riders shifted from automobiles. Transit planners can internalize these measures by identifying energy consumption and air emission payback goals and establishing policies that incentivize the corresponding shifts that are needed to meet the payback speeds.

## CHAPTER 5:

### Phase 2 – Regional Environmental Effects


By structuring the LCA around the question of “What are the net effects of the decision to build and operate the orange or gold lines in Los Angeles?” a different analytical system boundary must be used to evaluate only life-cycle components that have changed. In Figure 13 the attributional life cycle footprint for a sedan includes infrastructure construction. However, the decision to build and operate the Orange and Gold lines did not likely reduce roadway construction in Los Angeles. To determine when environmental paybacks occur, it is necessary to evaluate the upfront effects from constructing the transit systems, the effects of operating the transit systems, and the avoided effects of passengers switching from automobiles.

The operation/propulsion and avoided automobile effects are based on historical trends and ridership surveys. The Orange and Gold lines each currently perform roughly 1.5 million VMT annually system wide [LA Metro 4-24 2010]. Given historical trends and increasing demand it is estimated that this will increase to 2.5 million VMT after two decades. For all vehicles, it is assumed that the environmental efficiency gains (55 mile per gallon sedan, Orange BAT, and Gold RPS) are achieved over two to three decades. Payback is most sensitive to the number of avoided automobile trips which is consistent with findings for future mode long-distance travel in California [Chester and Horvath 2012]. Travel surveys indicate that 25 percent of Orange line travelers were previously driving and 67 percent of Gold line travelers [Flynn et al. 2011, LA Metro Gold 2004]. Few travel surveys exist for mode shift behavior creating a large degree of uncertainty around these sensitive input parameters. While the following discussion uses the percentages to illustrate the payback concept, future work should explore the sensitivity of payback to this input.

#### 5.1 GHG Payback

The GHG payback is shown in Figure 25. The abscissa is decades with construction occurring in decade one and transit operation commencing in decade two.

**Figure 25: GHG (Gg CO<sub>2</sub>e) Payback for Orange and Gold Lines**

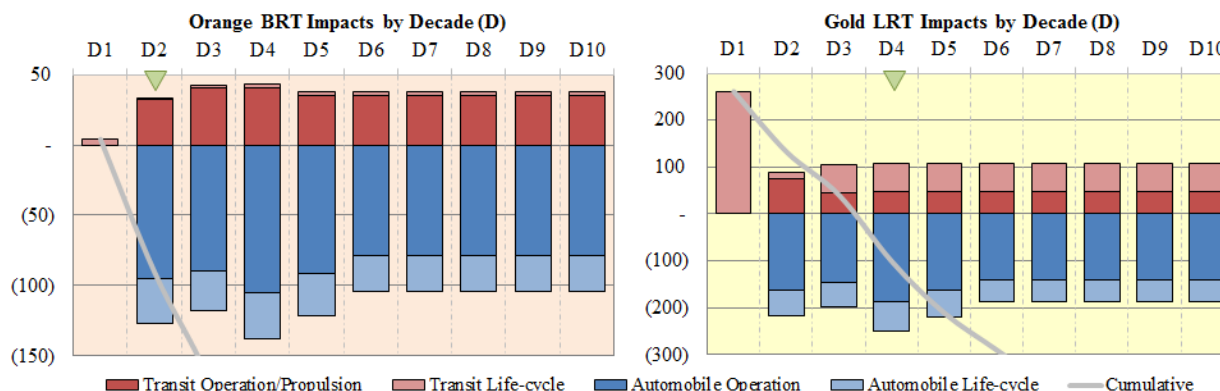




Both the Orange and Gold lines produce paybacks on GHG emissions during the first operational decade due to the large avoided automobile emissions that dwarf initial construction emissions. Avoided automobile emissions decrease over time because it is assumed that vehicles transition towards 55 miles per gallon in decade six. The Orange line initial construction effects are minimal due to the lower GHG material footprint compared to the Gold line's use of concrete. While uncertainty exists around automobile mode shifts, preliminary indications are that both systems will produce GHG savings for Los Angeles in the near term.

## 5.2 Connecting Emissions with Impact Potentials

CAP emissions are joined with human and environmental impact characterization factors from the Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI, v2.03) to assess the potential for human health and environmental impacts [Bare et al. 2002]. Impact characterization factors are used to show the maximum potential effects of pollutant releases. Human health respiratory impact and tropospheric ozone (smog) formation potentials are determined. The impact potentials are the maximum effects that can occur and actual effects may be lower.


The potential for respiratory impacts will be reduced by the Orange and Gold lines (Figure 26) in the near-term. The Orange line will produce significant respiratory impact potential savings immediately after operation begins and the Gold line will produce savings after roughly 30 years of operation due to the large initial construction  $PM_{2.5}$  emissions impacts that it must overcome.

**Figure 26: Respiratory Impact Potential (Mg  $PM_{2.5e}$ ) Payback**

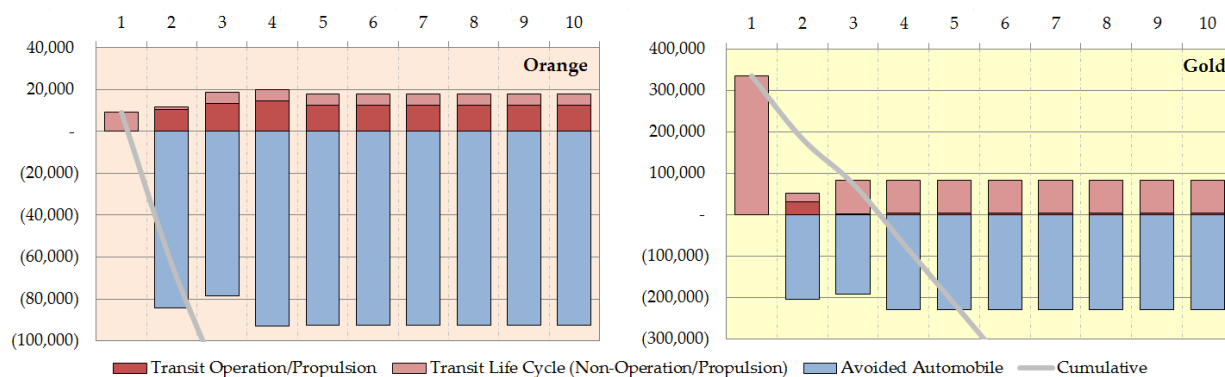

The same effect is seen for the potential for ozone formation. Gold line impacts will take several decades to payback due to high  $NO_x$  emissions from power generation. Again, it is stressed that impact *potentials* are calculated and actual outcomes are likely to be lower.

**Figure 27: Smog Formation Potential (Pg O<sub>3</sub>e) Impact**

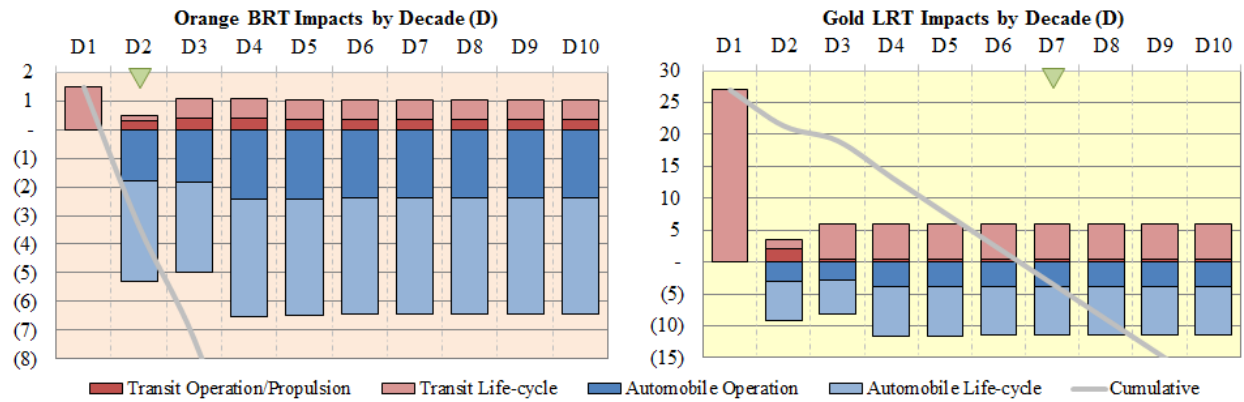

Additional discussion of the results is available in Chester et al. (2013).



## CHAPTER 6:

# Policy Implications of LCA and LA Transportation Alternatives

The results described in Chapter 4 have a number of basic policy implications. Because LCA involves a comprehensive inventory of energy use and emissions over the entire production cycle and operational lifespan of a given transportation system, it considers impacts that are diffuse in time and space. This means that policymaking to consider life cycle impacts will not follow a one-size-fits-all approach, but instead will vary depending on which emission(s) and which transportation systems are being discussed.

In this analysis, we have considered energy use, GHGs, and conventional air emissions for cars, bus rapid transit, and light rail transit in the Los Angeles basin. Three basic observations relevant to policymaking can therefore be made about these travel modes and emissions types:

1. For any given greenhouse gas, all emissions everywhere are functionally the same. Because the atmosphere is a global commons and climatic changes take decades to manifest, a molecule of carbon dioxide emitted in Los Angeles today as a vehicle is being operated has essentially the same impact as one emitted in Alabama or Italy two years ago when the vehicle was being manufactured. Moreover, the eventual impacts to Los Angeles are the same for a given level of global CO<sub>2</sub> pollution, no matter where the CO<sub>2</sub> was emitted. (The same is largely true for other GHGs, although some are shorter-lived in the atmosphere than CO<sub>2</sub> and therefore the timing of emissions could matter more.) This means that policymakers in Los Angeles (or California) concerned about global warming theoretically have just as much incentive to reduce supply-chain-related GHG emissions as they do local vehicle-operations-related emissions.
2. For conventional air emissions, spatial and temporal differences matter greatly. These pollutants are not globally equivalent, but instead have impacts that are concentrated either near the site of emission, or in downwind locations dictated by prevailing regional weather patterns. Moreover, they disperse relatively rapidly, meaning that it may be possible to avoid acute impacts on human health or ecological systems by distributing emissions through time. Emissions that result from vehicle operation will have impacts on air quality within the local air basin, whereas those that result from vehicle manufacture (for example) will not. For local planners and air quality regulators charged with meeting attainment standards within the Los Angeles basin, there may be relatively little incentive under the current regulatory regime to incorporate consideration of supply-chain-related emissions of these pollutants.
3. With respect to life cycle energy use, it is important to remember that climate and environmental impacts of concern do not arise from energy use *per se*. Instead, they are by-products of the various forms of energy in use throughout the economy, including gasoline, diesel fuel, natural gas, biofuels, and the electricity generated from coal, nuclear, solar, wind and other sources. The degree to which energy use is undesirable is really a matter of what the fuel or generating mix in question consists of, and what its

by-products are. Policy should therefore focus on that issue, at least with respect to environmental impacts.

## 6.1 Policy Implications of Life Cycle GHG Emissions

As shown in Figure 13, the travel modes have different life cycle GHG profiles. These results have a number of broad implications for transportation and land use policy.

GHG emissions associated with vehicle operation and propulsion are the majority of all six life cycles. The retrospective assessment shows that the largest potential source of GHG emissions reductions *from the existing transportation system* will be achieved by targeting vehicle operation and propulsion, either by reducing usage (i.e. less travel), improving fuel efficiency of vehicles, or reducing the carbon intensity of the energy inputs. That is indeed where policy is currently focused, as the emission-reducing effects of improved Corporate Average Fuel Economy standards for cars, and the electricity Renewable Portfolio Standard for the propulsion electricity of the light rail, are clearly evident in Figure 13. It is worth noting that none of the improvements analyzed in Figure 13 even approaches an 80 percent reduction of GHG emissions, the official goal of the State of California and the international scientific consensus.

The large additional increment of life cycle GHG emissions associated with the manufacture and maintenance of cars (approximately one-third as big as operational emissions for both 35 and 54 mile per gallon sedans) suggests that policy should also focus on ways to reduce the *absolute number* of cars in use (and hence avoiding their manufacture), not only the number of miles that they are driven. From a policy perspective, this implies smart land use planning to create communities where it is convenient and desirable for households to own fewer cars. Enabling zero-car or one-car households to thrive on a large scale will require a qualitative transformation in regional land use patterns, not small tweaks to prevailing patterns of widely dispersed single-family homes.

Though both transit systems outperform cars, BRT also significantly outperforms LRT under current conditions, where it is about 30 percent lower in life cycle GHG emissions. BRT systems generally also have significantly lower initial capital costs and much greater operational flexibility than LRT projects, which rely upon expensive fixed rails that cannot easily be retrofitted, re-routed or connected to existing local streets. For these reasons, it may be easier for local or regional transportation agencies to implement and manage BRT projects autonomously through self-help revenues rather than through diminishing, restrictive, and competitive state and federal funds. For regions and localities seeking to meet GHG emissions targets under AB 32 and SB 375, these are significant advantages.

Despite BRT's present-day advantages over light rail in GHG emissions per PMT, Figure 13 also shows that LRT may have greater potential to deeply reduce life cycle emissions as the state seeks to achieve its long-range goal of 80 percent GHG reductions by 2050. This is because propulsion electricity and infrastructure operations dominate the life cycle GHG emissions of LRT, and theoretically both could be provided by almost-GHG-free electricity, such as that generated from nuclear, solar or wind. Cars and BRT could also be converted to almost-GHG-free electricity for operations, but vehicle manufacturing components are a much larger slice of

their overall life cycle GHGs than for LRT (where they are almost negligible). Manufacturing processes are likely to be more difficult to fully decarbonize than vehicle operations, since they often rely on intense applications of energy (e.g. steel smelting) that may not be efficiently or effectively supplied by electricity.

The policy levers for decarbonizing vehicle operations for BRT and LRT are quite different. Because BRT is more likely to be locally implemented and controlled, it may be easier for a motivated local government to decarbonize more rapidly through their BRT system design and fueling decisions, but there may be less direct leverage for state or federal regulation (apart from heavy-vehicle fuel efficiency standards). Decarbonization of LRT systems, on the other hand, will depend on decisions made by utilities, state energy regulators and legislators about the electricity generating mix that are beyond the control of local governments. California's Renewable Portfolio Standard, for example, will reduce the life cycle GHG emissions of electricity-dependent LRT systems, but will have minimal effects on BRT life cycle emissions.

The environmental payback speed analysis in Figure 24 also suggests certain policy priorities for state, regional, and local governments. For GHGs, the Orange and Gold lines will begin payback at mode shifts of about 20 percent. However, in both cases, GHG payback accelerates rapidly until mode shift reaches about 60 percent, at which point the curves begin to flatten out. That suggests that ensuring that 60 percent of transit riders have switched from automobiles is an important GHG-related target for transportation and land use policy under SB 375 and other regulatory efforts, at least under current technologies and planning conditions. As Figure 24 and the discussion preceding it show, mode shifts to the Gold Line appear to have exceeded that threshold already, but those to the Orange Line have not. Despite this, the Orange Line BRT will pay back GHGs more quickly than the Gold Line because of lower initial GHG "costs" to build the system.

## **6.2 Policy Implications of Life Cycle Conventional Air Emissions**

Figure 14 through Figure 19 show the life cycle emissions for various criteria pollutants from the three transportation systems. These results have a number of broad implications for transportation and land use policy.

With respect to particulates (Figure 14 and Figure 15), vehicle operation effects are dwarfed by supply-chain effects, including mining and metals production. Since these emissions generally don't occur in the air basin where the vehicles are operated, there is a spatial mismatch for policymaking. Clean Air Act enforcement largely focuses on reducing emissions within local air basins, not the out-of-basin consequences of local decisions. Environmental impact assessment for the transportation systems could certainly take these out-of-basin emissions into account, but it is unclear whether it currently would be practical to require mitigation of these impacts. Greater standardization and acceptance of LCA techniques in environmental impact assessment might allow this. It is worth noting that within the vehicle operation emissions slice, the transit systems do significantly outperform cars, so local air quality policy can focus on shifting people into transit for air basins that are out of attainment for particulates.

As noted, SO<sub>2</sub> emissions (Figure 16) are predominantly a by-product of coal-fired electricity generation. The Gold Line LRT therefore shows a huge reduction in life cycle emissions associated with the implementation of the Renewable Portfolio Standard. From a policy point of view, this dovetails well with GHG emissions reduction objectives, since minimizing coal combustion is imperative to meeting global climate goals. As with particulates, these electricity-related emissions are generally not within the same air basin as the vehicle operations.

NO<sub>x</sub> emissions (Figure 17) are predominantly from diesel and natural gas combustion as well as electricity generation. Due to the large use of coal in the near-term, Gold line operation results in significant NO<sub>x</sub> emission and divestiture in this fuel will greatly reduce the footprint of this mode. Furthermore, these emissions do occur in the same air basin as the transportation systems operate. The NO<sub>x</sub> emissions are largely due to imported electricity from Arizona and Utah and the deployment of new light rail systems should be joined with the purchase of renewables if power generation would occur locally.

Emissions of VOC (Figure 18) are largely an out-of-basin impact, and hence are subject to the same spatial mismatch as particulates and SO<sub>2</sub>. For local air basins that are out-of-attainment for VOC, however, LRT performs very well in terms of vehicle operations (as well as full life cycle) emissions.

NO<sub>x</sub> and VOC emissions react to produce ozone, a secondary pollutant, and Los Angeles is currently the worst-ranked city in the US [American Lung Association 2011]. The Orange and Gold lines have the potential to reduce ambient ozone concentrations in Los Angeles. However, the fine particles released in coal combustion may result in large out-of-basin respiratory impacts.

CO emissions (Figure 19) are almost exclusively an in-basin impact. LRT performs very well on a life cycle basis because there is minimal localized combustion of gasoline, diesel, or natural gas.

As Figure 24 shows, paybacks for criteria pollutants begin at very low mode shifts for the Gold Line LRT, and in the range between 10 and 30 percent for the Orange Line BRT. As noted above, this suggests that transit planners can be assured that, as long as they achieve 30 percent mode shift, payback will eventually occur for all pollutants. However, the potential speed of payback varies for the two lines. Figure 26 underscores this, as payback for maximum potential respiratory impact is about three decades for the Gold Line LRT, but almost immediate for the Orange Line BRT.

The payback results must be interpreted with care, however. These are theoretical maxima for potential smog formation (and respiratory illness), not projections of how much would actually be produced by these transit systems. Moreover, LCA data are typically not geographically specified leaving the practitioner with an inability to distinguish between in-basin and out-of-basin effects, a crucial distinction when considering smog formation, which requires interaction between NO<sub>x</sub> and VOCs as well as other geographic and atmospheric conditions. In addition, mitigation actions may also be able to reduce in-basin emissions of NO<sub>x</sub> from the transit lines.

## REFERENCES

[AAA 2011, AAA (2011)]

American Automobile Association (AAA), *Your Driving Costs*, 2011.

[American Lung Association 2011, American Lung Association (2011)]

American Lung Association, State of the Air 2011 City Ranks, available online at <http://www.stateoftheair.org/2011/city-rankings/>.

[AnsaldoBreda 2011, AnsaldoBreda (2011)]

AnsaldoBreda, *Los Angeles Light Rail Specifications*, 2011, available online at <http://www.ansaldobredainc.com/light-rail-vehicles/light-rail-los-angeles>.

[Ayala DEER 2003, Ayala DEER (2003)]

Alberto Ayala, Norman Kado, Robert Okamoto, Michael Gebel, Paul Rieger, Reiko Kobayashi, and Paul Kuzmicky, *CNG and Diesel Transit Bus Emissions in Review*, Proceedings of the U.S. Department of Energy's 9<sup>th</sup> Diesel Engine Emissions Reduction Conference, 2003.

[Ayala et al. SAE 2003, Ayala et al. SAE (2003)]

Alberto Ayala, Michael Gebel, Robert Okamoto, Paul Rieger, Norman Kado, Cherie Cotter, and Namita Verma, *Oxidation Catalyst Effect on CNG Transit Bus Emissions*, 2003, Society of Automotive Engineers Technical Paper 2003-01-1900, available online at <http://dx.doi.org/10.4271/2003-01-1900>.

[Ayala et al. 2002, Ayala et al. (2002)]

Alberto Ayala, Norman Kado, Robert Okamoto, Britt Holmen, Paul Kuzmicky, Reiko Kobayashi, and Keith Stiglitz, *Diesel and CNG Heavy-duty Transit Bus Emissions over Multiple Driving Schedules: Regulated Pollutants and Project Overview*, 2002, Society of Automotive Engineers Technical Paper 2002-01-1722, available online at <http://dx.doi.org/10.4271/2002-01-1722>.

[Bare et al. 2002, Bare et al. (2002)]

Jane Bare, Greg Norris, David Pennington, and Tom McKone, *TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts*, 2002, *Journal of Industrial Ecology* 6(3-4) 49-78, available online at <http://dx.doi.org/10.1162/108819802766269539>.

[CA-GREET1 2009, CA-GREET1 (2009)]

*California Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (CA-GREET) Fuel Cycle Model version 1.8*, California Low Carbon Fuel Standard Program, 2009.

[Callaghan and Vincent 2007, Callaghan and Vincent (2007)]

Lisa Callaghan and William Vincent, *Preliminary Evaluation of Metro Orange Line Bus Rapid Transit Project*, Transportation Research Record 2034, 2007, available online at <http://dx.doi.org/10.3141/2034-05>.

[CARB 2000, CARB (2000)]

Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles, 2000, California Air Resources Board: Sacramento, CA.

[Chester et al. 2013, Chester et al. (2013)]

Mikhail Chester, Stephanie Pincetl, Zoe Elizabeth, William Eisenstein, and Juan Matute, *Infrastructure and Automobile Shifts: Positioning Transit to Reduce Life-cycle Environmental Impacts for Urban Sustainability Goals*, Environmental Research Letters, In Press but expected in 2013.

[Chester and Horvath 2012, Chester and Horvath (2012)]

Mikhail Chester and Arpad Horvath, *High-speed Rail with Emerging Automobiles and Aircraft Can Reduce Environmental Impacts in California's Future*, Environmental Research Letters 7(3), 2012, available online at <http://dx.doi.org/10.1088/1748-9326/7/3/034012>.

[Chester et al. ERL 2010a, Chester et al. ERL (2010a)]

Mikhail Chester, Arpad Horvath, and Samer Madanat, *Parking Infrastructure: Energy, Emissions, and Automobile Life-cycle Environmental Accounting*, Environmental Research Letters 5(3), 2010, available online at <http://dx.doi.org/10.1088/1748-9326/5/3/034001>.

[Chester and Horvath ERL 2010b, Chester and Horvath ERL (2010b)]

Mikhail Chester and Arpad Horvath, *Life-cycle Assessment of High-Speed Rail: The Case of California*, Environmental Research Letters 5(1), 2010, available online at <http://dx.doi.org/10.1088/1748-9326/5/1/014003>.

[Chester et al. AE 2010, Chester et al. AE (2010)]

Mikhail Chester, Arpad Horvath, and Samer Madanat, *Comparison of Life-cycle Energy and Emissions Footprints of Passenger Transportation in Metropolitan Regions*, Atmospheric Environment 44(8), 2010, available online at <http://dx.doi.org/10.1016/j.atmosenv.2009.12.012>.

[Chester and Horvath 2009, Chester and Horvath (2009)]

Mikhail Chester and Arpad Horvath, *Environmental Assessment of Passenger Transportation Should Include Infrastructure and Supply Chains*, Environmental Research Letters 4(2), 2009, available online at <http://dx.doi.org/10.1088/1748-9326/4/2/024008>.

[Chester 2008, Chester (2008)]

Mikhail Chester, *Life-cycle Inventory of Passenger Transportation Modes in the United States*, Doctoral Dissertation, University of California, Berkeley, 2008, available online at <http://escholarship.org/uc/item/7n29n303>.

[City of Los Angeles 2011, City of Los Angeles (2011)]

City of Los Angeles, Office of the Mayor, *Framework of Sustainable Transit Communities*, 2011.

[Clark et al. 1999, Clark et al. (1999)]

Nigel Clark, Mridul Gautam, Byron Rapp, Donald Lyons, Michael Graboski, Robert McCormick, Teresa Alleman, and Paul Norton, *Diesel and CNG Transit Bus Emissions Characterization by Two Chassis Dynamometer Laboratories: Results and Issues*, 1999, Society of Automotive Engineers Technical Paper 1999-01-1469.

[Ecoinvent 2010, Ecoinvent (2010)]

*Ecoinvent v2.2 Life Cycle Assessment Software*, Swiss Centre for Life Cycle Inventories, 2010.

[EIOLCA 2011, EIOLCA (2011)]

Economic Input-Output Life Cycle Assessment (EIOLCA) Model, Carnegie Mellon University's Green Design Institute, accessed July 2011, available online <http://www.eiolca.net/>.

[EPA Mobile6 2003, EPA Mobile6 (2003)]

U.S. Environmental Protection Agency (EPA), *MOBILE6 Vehicle Emission Modeling Software*, 2003.

[FHA 2008, FHA (2008)]

Federal Highway Administration (FHA), *Highway Statistics 2008 Table HM-71 (Urbanized Areas – 2008 Miles and Daily Vehicle Miles Traveled)*, 2008.

[FHA 1995, FHA (1995)]

Federal Highway Administration (FHA), *Background of Superpave Asphalt Mixture Design and Analysis*, 1995, available online at <http://www.fhwa.dot.gov/pavement/>.

[Flynn et al. 2011, Flynn et al. (2011)]

Jennifer Flynn, Cheryl Thole, Victoria Perk, Joseph Samus, and Caleb Van Nostrand, *Metro Orange Line BRT Project Evaluation*, 2011, Federal Transit Administration.

[Gautam et al. 2011, Gautam et al. (2011)]

Mridul Gautam, Arvind Thiruvengadam, Daniel Carder, Marc Besch, Benjamin Shade, Greg Thompson, and Nigel Clark, *Testing of Volatile and Nonvolatile Emissions for Advanced Technology Natural Gas Vehicles*, 2011, West Virginia University: Morgantown, WV.

[Google Earth 2011, Google Earth (2011)]

*Google Earth Software*, version 6.0.3, available online at <http://www.google.com/earth/>.

[GREET1 2012, GREET1 (2012)]

*Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) Fuel Cycle Model*, U.S. Department of Energy's Argonne National Laboratory, 2012.

[GREET2 2012, GREET2 (2012)]

*Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) Vehicle Cycle*, U.S. Department of Energy's Argonne National Laboratory, 2012.

[Huang 2004, Huang (2004)]

Y Huang, *Pavement Analysis and Design*, 2<sup>nd</sup> Edition, Prentice Hall, Upper Saddle River, NJ, 2004.

[ICCT 2009, ICCT (2009)]

The International Council on Clean Transportation (ICCT), *CNG Bus Emissions Roadmap: from Euro III to Euro VI*, 2009.

[Kado et al. 2005, Kado et al. (2005)]

Norman Kado, Robert Okamoto, Paul Kuzmicky, Reiko Kobayashi, Alberto Ayala, Michael Gebel, Paul Rieger, Christine Maddox, and Leo Zafonte, *Emissions of Toxic Pollutants from Compressed Natural Gas and Low Sulfur Diesel-Fueled Heavy-Duty Transit Buses Tested over Multiple Driving Cycles*, 2005, *Environmental Science and Technology* 39(19), available online at <http://dx.doi.org/10.1021/es0491127>.

[LACTC 1988, LACTC (1988)]

Los Angeles County Transportation Commission, *Draft Environmental Impact Report for the Pasadena-Los Angeles Rail Transit Project*, Appendix F: Engineering Drawings, 1988.

[LADWP 2011, LADWP (2011)]

Los Angeles Department of Water and Power, *Power Integrated Resource Plan*, 2011.

[LA Metro Gold 2011, LA Metro Gold (2011)]

Los Angeles Metro, *Gold Line Map, Station Locations, Parking, and Timetable*, available online at <http://www.metro.net/around/rail/gold-line/>, accessed August 1, 2011.

[LA Metro Gold Ridership 2011, LA Metro Gold Ridership (2011)]

Los Angeles Metro, *Gold Line Rail Activity 2011* data provided by Susan Phifer. See LA Metro Personal Communications (2011) note E.

[LA Metro Orange 2011, LA Metro Orange (2011)]

Los Angeles Metro, *Orange Line Map, Station Locations, Parking, and Timetable*, available online at <http://www.metro.net/around/rail/orange-line/>, accessed July 17, 2011.

[LA Metro Orange Ridership 2011, LA Metro Orange Ridership (2011)]



Los Angeles Metro, *Orange Line Observed Load Factors FY2011 Q3* data provided by Scott Page. See LA Metro Personal Communications (2011) note C.

[LA Metro Orange 2000, LA Metro Orange (2000)]

Los Angeles Metro, *San Fernando Valley East-West Transit Corridor, Major Investment Study*, 2000.

[LA Metro Personal Communications 2011, LA Metro Personal Communications (2011)]

Los Angeles Metro, *Personal Communications*

A. John Drayton, July 15, 2011.

B. Alvin Kusumoto, August 2, 2011.

C. Scott Page, August 2, 2011.

D. Jimmy Jimenez, July 26, 2011.

E. Susan Phifer, Planning Manager, August 3, 2011.

F. Cris Liban.

[LA Metro 4-24 2010, LA Metro 4-24 (2010)]

Los Angeles Metro, *Scheduled Service Operating Cost Factors Reports*.

[LA Metro Gold 2004, LA Metro Gold (2004)]

Los Angeles Metro, *Gold Line Corridor Before/After Study*, 2004.

[Lanni et al. 2003, Lanni et al. (2003)]

Thomas Lanni, Brian Frank, Shida Tang, Deborah Rosenblatt, and Dana Lowell, *Performance and Emissions Evaluation of Compressed Natural Gas and Clean Diesel Buses at New York City's Metropolitan Transit Authority*, 2003, Society of Automotive Engineers Technical Paper 2003-01-0300, available online at <http://dx.doi.org/10.4271/2003-01-0300>.

[McPherson 1990, McPherson (1990)]

Gregory McPherson, *Modeling Residential Landscape Water and Energy Use to Evaluate Water Conservation Policies*, *Landscape Journal*, 9(2), available online at <http://dx.doi.org/10.3368/lj.9.2.122>.

[NTD 2009, NTD (2009)]

*National Transit Database (NTD)*, Federal Transit Administration, 2009.

[NREL 2006, NREL (2006)]

National Renewable Energy Laboratory (NREL), *Washington Metropolitan Area Transit Authority: Compressed Natural Gas Transit Bus Evaluation*, 2006, Technical Report NREL/TP-540-37626.

[NREL 2005, NREL (2005)]

National Renewable Energy Laboratory (NREL), *Emission Testing of Washington Metropolitan Area Transit Authority (WMATA) Natural Gas and Diesel Transit Buses*, 2005, Technical Report NREL/TP-540-36355.

[Nylund 2004, Nylund (2004)]

Nils-Olof Nylund, Kimmo Erkkila, Maija Lappi, and Markku Ikonen, *Transit Bus Emission Study: Comparison of Emissions from Diesel and Natural Gas Buses*, VTT Research Report PRO3/P5150/04, 2004.

[PaLATE 2004, PaLATE (2004)]

*Pavement Life-cycle Assessment Tool for Environmental and Economic Effects (PaLATE)*, University of California, Berkeley, CA, 2004, available online at [www.ce.berkeley.edu/~horvath/palate.html](http://www.ce.berkeley.edu/~horvath/palate.html).

[Ross 1994, Ross (1994)]

Marc Ross, *Automobile fuel consumption and emissions: effects of vehicle and driving characteristics*, Annual Review of Energy and the Environment, 19, available online at <http://dx.doi.org/10.1146/annurev.eg.19.110194.000451>.

[SCAG 2003, SCAG (2003)]

Southern California Association of Governments (SCAG), *Year 2000 Post-Census Regional Travel Survey*, 2003.

[SimaPro 2012, SimaPro (2012)]

*SimaPro 7.3.3 Life Cycle Assessment Software*, Pré: Product Ecology Consultants, Amersfoort, Netherlands, 2012.

[Stokes and Horvath 2009, Stokes and Horvath (2009)]

Jennifer Stokes-Draut and Arpad Horvath, *Energy and Air Emissions Effects of Water Supply*, 2009, Environmental Science and Technology, 43(8), available online at <http://dx.doi.org/10.1021/es801802h>.